Catalog P142 | September 2014

THOUSANDS OF POWER PRODUCTS TO CHOOSE FROM

POWER RESOURCE CENTER

1-800-831-4242 | www.Jameco.com

JAMECO® ELECTRONICS

FEATURED PRODUCTS

GS Series 3-Wire Table-Top Power Supplies

Table-Top Power Supplies on pages 7-9

High-efficiency table-top power supplies can be used just about anywhere. They will stay reliable and consume less power than your typical chargers, plus they meet numerous standards that protect you against the environment.

Web Code: DDZ

- Universal AC input/full range
- 3 pole AC inlet IEC320-C14
- Short-circuit, overload, over-voltage, over-temperature protection
- GS40/GS60: No load power consumption < 0.3W
- GS90/GS120: No load power consumption < 0.5W
- Fully enclosed plastic case
- Class I power (with earth pin)
- Meets EISA 2007 (Energy Independence and Security Act)
- Approvals: UL/CUL/TUV/BSMI/CCC/CB/FCC/CE
- AC cord not included (recommend P/N 38050, pg 14)

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Input (VAC @ Hz, VDC)	Output Connector	Efficiency (%)	Size (W" x H" x D")	1	10
1952345	GS40A12-P1J	+12VDC @ 3.34A	40	90-264 @ 47-63, 127-370	2.1mm x 5.5mm F2	89.0	4.9 x 2.0 x 1.2	$15.95	$14.49
1952370	GS60A12-P1JU	+12VDC @ 5.0A	60	90-264 @ 47-63, 135-370	2.1mm x 5.5mm F2	88.0	4.9 x 2.0 x 1.2	17.95	15.95
2078291	GS90A12-P1M†	+12VDC @ 6.67A	80	90-264 @ 47-63, 135-370	2.5mm x 5.5mm F2	88.0	5.7 x 2.4 x 1.3	28.95	25.95
1952214	GS60A24-PIJU	+24VDC @ 2.5A	60	90-264 @ 47-63, 135-370	2.1mm x 5.5mm F2	90.0	4.9 x 2.0 x 1.2	17.95	15.95
2078338	GS90A24-P1M	+24VDC @ 3.75A	90	90-264 @ 47-63, 135-370	2.5mm x 5.5mm F2	89.5	5.7 x 2.4 x 1.3	28.95	25.95
2135208	GS120A24-P1M	+24VDC @ 5.0A	120	85-264 @ 47-63, 120-370	2.5mm x 5.5mm F2	89.5	6.6 x 2.6 x 1.4	43.95	39.95

*No over-temperature protection † Energy Star Level V compliant

High Efficiency, Small Density Open-Frame Power Supplies

Open-Frame Power Supplies on pages 15-16 & 20

EPP Series

Web Code: OSP

- Input: 90-264VAC @ 47-63Hz, 127-370VDC
- Built-in active PFC function
- Short-circuit, overload, over-voltage, over-temperature protection
- High efficiency
- LED indicator for power on
- No load power consumption <0.5W
- Built-in 12V/0.3A auxiliary output
- Free air convection, higher power rating with forced air
- Compact size: 4.0"L x 2.0"W x 1.1"H

Part No.	Mfr. Part No.	Output Voltage @ Current	Output Power	Load Regulation (±%)	Line Regulation (±%)	Efficiency (%)	Pricing 1	Pricing 10
2172447	EPP-150-12	12V @ 12.5A	100.8W	1.0	0.5	91.5	$74.95	$69.95
2172412	EPP-100-24	24V @ 4.2A	100.8W	1.0	0.5	92.0	59.95	56.95
2172463	EPP-150-24	24V @ 6.25A	100.8W	1.0	0.5	93.0	74.95	69.95
2164279	EPP-300-24*	24V @ 12.5A	300W	1.0	0.5	92.5	74.95	67.95

*5.0"L x 3.0"W x 1.4"H, built-in remote sense function, 12V/0.5A aux output

NEW MARKED IN PINK

EPP-150

EPS Series

- Input: 85-264VAC @ 47-63Hz, 120-370VDC
- Short-circuit, overload, over-voltage protection
- Cooling by free air convection
- LED indicator for power on
- No load consumption less than 0.3W
- Compact size: 3.0"L x 2.0"W x 0.9"H (P/N 2164498: 4.0"L x 2.0"W x 1.1"H)

2164316	EPS-25-5	5V @ 5.0A	25W	1.0	0.5	81.0	$11.95	$10.95
2164498	EPS-45-5	5V @ 8.0A	40W	1.0	0.5	82.0	13.95	12.95
2164324	EPS-25-7.5	7.5V @ 3.4A	25.5W	1.0	0.5	83.0	11.95	10.95
2164332	EPS-25-12	12V @ 2.1A	20.08W	0.5	0.5	86.0	11.95	10.95
2164341	EPS-25-15	15V @ 1.7A	25.5W	0.5	0.5	87.0	11.95	10.95

EPS-25

Medical Rated AC-to-DC Single Output Table-Top Power Supplies

Medical Power Supplies on pages 6 & 16

These highly reliable green medical adapters meet the demands of many medical electrical devices. They satisfy all international standards preventing possible electric shock as well as keeping all patients and doctors safe.

Web Code: WBM

- 2.5mm x 5.5mm female center positive
- Input voltage: 80-264VAC @ 47-63Hz, 113-370VDC
- Leakage current: less than 100µA max.
- High efficiency up to 91%
- Built-in active PFC function
- Short-circuit, overload, over-voltage and over-temperature protection
- Class II power
- AC cord not included (recommend P/N 189587)
- Size: 5.71"L x 2.36"W x 1.26"H

NEW MARKED IN PINK

Part No.	Mfr. Part No.	Output (VDC @ Amps)	Power (W)	1	10
2210466	GSM90B12-P1M	+12 @ 6.67	80	$39.95	$36.95
2210474	GSM90B15-P1M	+15 @ 6.0	90	39.95	36.95
2210482	GSM90B19-P1M	+19 @ 4.74	90	39.95	36.95
2210491	GSM90B24-P1M	+24 @ 3.75	90	39.95	36.95
2210503	GSM90B48-P1M	+48 @ 1.87	90	39.95	36.95

LPV Series LED Power Supplies

LED Power Supplies on page 21

If you're looking for compact power to drive your small-medium LED systems, then look no further than the LPV series. These are IP67 rated so they are completely protected against dust and can be submerged in 1 meter of water safely for extra versatility.

Web Code: LPP

- Constant voltage design
- Input: 90-264VAC @ 47-63Hz, 127-370VDC
- Fully isolated plastic case
- Encapsulated with IP67 level protection
- Short-circuit, overload, over-voltage protection
- UL1310 Class 2 power unit
- Withstands 300VAC surge input for 5 seconds
- 100% full load burn-in test

Part No.	Mfr. Part No.	Output Voltage @ Current	Enclosure Rating	Efficiency	Size (W" x H" x D")	1	5
2102596	LPV-20-12	+12V @ 1.67A	IP67	81%	4.6 x 1.4 x 1.0	$11.95	$9.95
2102609	LPV-20-15	+15V @ 1.33A	IP67	83%	4.6 x 1.4 x 1.0	6.95	6.49
2102617	LPV-20-24	+24V @ 0.84A	IP67	83%	4.6 x 1.4 x 1.0	11.95	9.95
2103142	LPV-35-12	+12V @ 3.0A	IP67	84%	5.8 x 1.6 x 1.2	15.95	14.49
2103169	LPV-60-12	+12V @ 5.0A	IP67	83%	6.4 x 1.7 x 1.3	18.95	16.95
2102801	LPV-60-24	+24V @ 2.5A	IP67	86%	6.4 x 1.7 x 1.3	18.95	16.95

LPV-20

You Have the Power with Jameco Electronics

When you order from Jameco, you don't have to break the bank to get high-quality power supplies.

Jameco gives you the power of choice when shopping: you can buy brand names at prices lower than you may expect or choose cost-saving house brands to fit your requirements.

Our Power Supply and Wall Adapter category has products from some of the industry's most popular manufacturers, including Mean Well, Astec Power, Power-One, Seasonic and Sparkle Power. Not only do we carry the full line of Mean Well products, but we are also the top-stocked distributor of Mean Well power supplies.

Several low price alternatives to brand names are also available, such as our line of Jameco ReliaPro® wall transformers and table-top products.

We're happy to customize your wall adapter purchase or help you design in the right power solution. Call us at 800-831-4242 and ask to speak with one of our Power Specialists.

This catalog contains our most popular models, but you can enter any three-digit Web Code into the Jameco.com search box to get the latest products and more specifications, including current pricing and availability.

With more than 3,400 different power supplies – 2,900 from Mean Well alone – Jameco stocks the power supply you need.

The Jameco Difference

Customer Service

We work hard to provide the best customer service in the industry. Our management team's first priority is listening and responding to customer feedback. You can email the management team directly at Management@Jameco.com with your feedback and expect a prompt and personal response.

Improved Shipping Options

Jameco has been hard at work expanding shipping options which for many have significantly reduced shipping costs. Whether you are looking for low pricing on air shipping or just want it as inexpensive as possible, Jameco's expanded options start at less than $4.

Selection

If you want great service, low prices and a reliable supplier of low-cost electronic components, turn to Jameco first. We carry house brands, factory over-runs and are franchised with over 200 name brands color-coded throughout the catalog. Look for our spec-by-spec, feature-by-feature comparison-shopping. Jameco has long standing relationships with manufacturers around the world, and we work hard to source a wide selection of value components.

3 LEVELS OF SAVINGS

NAME BRANDS	HOUSE BRANDS	SPECIAL BUY

Catalog Tools

Jump from catalog to website seamlessly with Jameco's exclusive Web Code. By simply entering the three character code into the Jameco.com search box you'll find more information, additional web-only products and the latest pricing and availability information. Don't search; simply step from catalog to the website without missing a beat.

Enter the web code in the product search box

*Power Cords — Enter Web Code UBF



PayPal

Jameco Now Accepts PayPal

CATALOG QUICK INDEX

Featured Products	Inside Front Cover,25,Back Cover
Brackets & Accessories	20
Computer Power Supplies	9
DIN-Rail Power Supplies	22,Back Cover
Encapsulated Power Converters	23,24
Enclosed Power Supplies	16-20,25
High Efficiency Power Supplies	Inside Front Cover,20
High Voltage Power Supply	12
Interchangeable Power Adapters	4,6,9
LED Power Supplies & Drivers	Inside Front Cover,21,25
Medical Power Supplies	6,16,Back Cover
Open-Frame Power Supplies..	Inside Front Cover,15,16,20,Back Cover
Power Cables	9,10
Power Cords	6,11,13,14
Power Entry & Line Filters	13
Power Jacks, Plugs & Adapters	10
Power & Miscellaneous Transfomers	11,12
Table-Top Power Supplies	Inside Front Cover,6-9,Back Cover
Wall Adapters	2-6,9,24,25

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro and ReliaPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2014 James Electronics. All rights reserved.

AC-to-AC & AC-to-DC Regulated Switching Wall Adapters

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

AC-to-AC Wall Adapters

Input: 120VAC @ 60Hz

Female

Male

Female Right Angle

Screw Terminals

★Web Code: ABQ

2082530

206439

We specialize in Wall Adapters – Call for additional OEM PRICING. We are happy to change any listed AC wall adapter power plug to a connector of your choice for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

NEW MARKED IN PINK

Part No.	Manufacturer	Product No.	Output Rating Voltage (VAC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2082521	ReliaPro	5-2634	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	White	6'	0.4	UL/CSA	$2.25	$1.95	$1.59	$1.25
2082530	ReliaPro	5-2633	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	Black	6'	0.4	UL/CSA	3.59	3.25	2.95	2.49
100061	ReliaPro	ACU090050	9	500	2.1mm x 5.5mm **F**	2.7 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
236814	ReliaPro	ACU090080	9	800	3.5mm **M**	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	5.95
102234	ReliaPro	ACU090100	9	1000	2.1mm x 5.5mm **F**	3.2 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
1586154	OEM	AA091A	9	1000	2.5mm x 5.5mm **F**	2.2 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	7.95	6.95	6.25	5.59
157041	ReliaPro	ACU090100E8942	9	1000	2.5mm x 5.5mm **F**	2.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
2167648	OEM	AA091A5	9	1500	2.1mm x 5.5mm **F**	2.4 x 2.4 x 1.9	Black	6'	0.8	UL/CSA	9.95	8.95	7.95	6.49
320258	Ault	T48091500A010G	9	1500	2.5mm x 5.5mm **F**	2.6 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	9.95	8.95	7.95	6.49
112336	ReliaPro	ACU090150	9	1500	2.5mm x 5.5mm **F**	2.5 x 2.2 x 2.0	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
101258	ReliaPro	ACU120050	12	500	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2179614	ReliaPro	ACU120050R	12	500	2.5mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	8.95	7.95	6.95	5.95
10081	ReliaPro	ACU120100J0920	12	1000	2.1mm x 5.5mm **F**	2.6 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
100167	ReliaPro	A411201000U	12	1000	2.5mm x 5.5mm **F**	3.2 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
10428	ReliaPro	ACU120100Z9121	12	1000	3.5mm **M**	2.6 x 2.4 x 2.0	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.29
2167576	ReliaPro	AM-121200A	12	1200	2.1mm x 5.5mm right angle **F**	3.2 x 2.1 x 1.9	Black	6'	0.9	UL/CSA	8.95	7.95	6.95	6.29
167151	ReliaPro	ADU120150	12	1500	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	11.95	10.95	9.95	8.95
307838	ReliaPro	ADU120160H4120	12	1600	2.5mm x 5.5mm **F**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	12.95	11.95	10.95	9.95
206404	MGElectronics	MGT1220	12	1670	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	9.95	8.95	7.95	7.29
2197581	ReliaPro	GPU48120200WA00	12	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.49
2197847	ReliaPro	A71235DC	12	3500	Stripped & tinned **(Table-Top style)**	3.9 x 2.7 x 2.2	Black	6'	2.1	UL/CSA	15.95	14.95	13.49	11.95
2138978	ReliaPro	JOD-48U-12A	13.5	1000	1.3mm x 3.5mm **F**	2.8 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	4.95
2082564	ReliaPro	GPU1355000	13.5	5000	2.1mm x 5.5mm **F (Table-Top style)**	4.7 x 3.2 x 2.5	Black	6'	2.4	—	12.95	11.49	10.95	9.49
171408	ReliaPro	ACU140050	14	500	2.1mm x 5.5mm **F**	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
318684	ReliaPro	ACU140085	14	850	2.5mm x 5.5mm right angle **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	11.95	10.95	9.95	8.95
100108	ReliaPro	ADU160100	16	1000	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2082142	Ault	308-2018	18	900	Screw terminals	1.9 x 2.2 x 2.0	Beige	—	0.7	UL	5.95	4.95	3.49	2.95
121216	ReliaPro	ADU180100	18	1000	2.1mm x 5.5mm **F**	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	11.95	10.95	9.95	8.95
2179622	ReliaPro	AFU180200	18	2000	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.1	Black	6'	1.7	—	12.95	11.95	10.95	9.95
87581	ReliaPro	ADU240050	24	500	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
206439	MGElectronics	MGT2420	24	830	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	10.95	9.95	8.95	7.95
140599	ReliaPro	ADU240100D5531	24	1000	2.1mm x 5.5mm **F**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
10102	ReliaPro	ADU240100E0461	24	1000	3.5mm **M**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2100195	ReliaPro	GPU572401500WA00	24	1500	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95
2197548	ReliaPro	GPU572402000WA00	24	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	13.49	11.95
2205579	MG Electronics	MGT2450P	24	2100	Screw terminals	3.2 x 2.2 x 1.9	White	—	0.9	UL/CUL	15.95	14.95	13.49	11.95

AC-to-DC Regulated Switching Wall Adapters

★Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING.
We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each. A 100 pc. minimum order applies. Overmolding also available @ $4.00 each.
A 100 pc. minimum order applies.

◆ Polarity 1 (+) (−) (center negative)
Polarity 2 (−) (+) (center positive)
Female(F) Male(M)

Female Straight

Female Right Angle

2158549

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
2201957	Deer Computer	AD1505C	5	1000	2.5mm x 5.5mm F **2**	100-240@47-63	2.8 x 1.4 x 2.1	Black	6'	0.3	UL/CUL/CE	$7.95	$6.95	$6.25
1940740	Mean Well CEC	GS12U05P1I	5	2000	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	4'	0.3	UL/CUL/CEC	10.49	8.95	8.49
2138741	ReliaPro	CP0520	5	2000	2.5mm x 5.5mm F **1**	100-240@47-63	3.0 x 1.1 x 1.6	Black	6'	0.4	UL/CUL/TUV	9.95	8.95	7.95
2188537	CUI Inc	EPAS-101W-05*	5	2000	2.5mm x 5.5mm right angle F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL	8.95	7.95	6.95
2138724	Jentec	AF1805A*	5	2500	2.1mm x 5.5mm right angle F **2**	100-120@50-60	2.4 x 1.9 x 1.1	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
2158549	ReliaPro CEC	S15AA05025001*	5	2500	2.5mm x 5.5mm right angle F **2**	100-240@50-60	3.0 x 2.2 x 1.3	Black	6'	0.3	UL/CUL/CEC	11.49	10.49	9.49
1952863	Mean Well CEC	GS18U05-P1J	5	3000	2.1mm x 5.5mm F **2**	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	11.95	10.95	9.95
2167664	Fairway	WN20U-050	5	3000	2.5mm x 5.5mm F **2**	100-240@50-60	2.9 x 2.0 x 1.6	Black	6'	0.4	UL/CUL	9.95	8.95	7.95
2135451	CUI Inc CEC	EPS050400H-P5RP-FL*	5	4000	2.1mm x 5.5mm right angle F **2**	90-132@47-63	3.3 x 2.0 x 1.5	Black	6'	0.4	UL/CUL/CEC	10.95	9.95	8.95
379623	Mean Well CEC	GS25U05-P1J	5	4000	2.1mm x 5.5mm F **2**	100-240@50-60	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	11.95	10.95	9.95
2082011	Friwo	MPA3U	6	400	2.1mm x 5.5mm right angle F **2**	100-240@50-60	2.8 x 2.0 x 0.7	Black	6'	0.3	UL/CUL	3.95	3.49	2.95
2172931	ReliaPro CEC	EA1006BU*	9	660	2.1mm x 5.5mm F **1**	100-240@50-60	2.1 x 1.4 x 1.0	Black	6'	0.1	UL/FCC/CEC	10.95	9.95	8.95
1940766	Mean Well	GS12U09-P1I	9	1330	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL	10.49	8.95	8.49
2179585	ReliaPro CEC	ADS-18C-12†*	9	2000	2.1mm x 5.5mm right angle F **2**	100-240@50-60	2.8 x 2.0 x 1.3	Black	6'	0.4	UL/CUL/CEC	10.95	9.95	8.95
1952847	Mean Well CEC	GS18U09-P1J	9	2000	2.1mm x 5.5mm F **2**	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	9.95
380140	Mean Well CEC	GS25U09-P1J	9	2780	2.1mm x 5.5mm F **2**	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	9.95

†RFI filter on cord *Slimline CEC

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well products. For additional Mean Well products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Wall Adapters (Continued)

*Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each. A 100 pc. minimum order applies. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

Female Straight

Screw Terminals

2179593

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
2173124	ReliaPro	EA1030U†	9	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.5	UL/CUL/CEC	$14.95	$13.49	$11.95
2121578	MG Electronics	ST-12500	12	500	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	8.95	7.95	7.49
2151101	ReliaPro	CNR2260	12	500	2.1mm x 5.5mm F 2	100-240@50-60	3.6 x 2.0 x 1.3	Black	6'	0.3	UL/CUL/CEC	7.95	6.95	6.25
2121586	MG Electronics	ST-121A	12	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	11.95	10.95	9.95
2197468	ReliaPro	S120S100B6*	12	1000	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.9 x 1.8 x 1.2	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
1940774	Mean Well	GS12U12-P1I	12	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.49	8.95	8.49
2179593	ReliaPro	ADS18C-121218†*	12	1500	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.8 x 2.0 x 1.3	Black	6'	0.4	UL/CUL/CEC	10.95	9.95	8.95
2209262	Asian Power	WA-18G12U	12	1500	2.1mm x 5.5mm F 2	100-240@50-60	3.0 x 1.9 x 1.3	Black	4'	0.3	UL/CUL/CEC	11.95	10.49	8.95
1952855	Mean Well	GS18U12-P1J	12	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.2	UL/CUL/CEC	11.95	10.95	10.49
2082134	MG Electronics	ST-122A	12	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.4	UL/CUL/CEC	14.95	13.49	11.95
2192739	Westell	585-200084*	12	2000	2.1mm x 5.5mm F 2	100-240@50-60	2.9 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CEC	10.95	10.49	9.95
2209166	ReliaPro	G1P-650†	12	2000	2.5mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.4	UL/CUL	11.95	10.49	8.95
380156	Mean Well	GS25U12-P1J	12	2080	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	11.95	10.95	10.49
2173984	Mean Well	GS36U12-P1J	12	3000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	3.3'	0.5	UL/CUL/CB/CSA	13.95	12.95	11.95
2173116	ReliaPro	EA1036U†	12	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	19.95	17.95	16.49
1952871	Mean Well	GS18U15-P1J	15	1200	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CEC	11.95	10.95	10.49
380173	Mean Well	GS25U15-P1J	15	1670	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	11.95	10.95	10.49
2173108	ReliaPro	EA1030CU†	15	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	14.95	13.95	12.49
380191	Mean Well	GS25U18-P1J	18	1380	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 1.2 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
1940803	Mean Well	GS12U24-P1I	24	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.49	8.95	8.49
1952898	Mean Well	GS18U24-P1J	24	750	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
2121594	MG Electronics	ST-241A	24	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	12.95	11.95	10.95
1953698	ReliaPro	MPC2400107	24	1000	2.1mm x 5.5mm F 2	100-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	14.95	13.49	11.95
1953671	ReliaPro	MPC-2400107	24	1000	2.5mm x 5.5mm F 2	120-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	14.95	13.49	11.95
380202	Mean Well	GS25U24-P1J	24	1040	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
2173095	ReliaPro	EA1030DU†	24	1250	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	14.95	13.95	12.49
2173992	Mean Well	GS36U24-P1J	24	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	3.3'	0.5	UL/CUL/CB/CSA	13.95	12.95	11.95
2167613	MG Electronics	ST-242A	24	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	6'	0.3	—	15.95	14.95	13.95
380220	Mean Well	GS25U28-P1J	28	890	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.6	UL/CUL/CEC	11.95	10.95	10.49
2179391	ReliaPro	PA1024-360HU	36	670	2.5mm x 5.5mm F 2	90-264@47-63	2.7 x 1.8 x 1.3	Black	6'	0.3	UL/CUL/CEC	14.95	13.95	12.49
380244	Mean Well	GS25U48-P1J	48	520	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49

†RFI filter on cord *Slimline CEC

AC-to-DC "Slim Line" Regulated Switching Wall Adapters

Output connector: 2.1mm x 5.5mm F2 (center positive)

Compact in size and lightweight, they are the perfect power solution in all those applications where space is critical. And their high efficiency satisfies requirements for minimizing power losses. You no longer have to deal with traditional wall adapters that block unused outlets in wall plates and power strips/surge protectors.

All are UL/CUL approved

We'll Brand the Adapters With Your Company Name Call 1-800-831-4242 for Details



- 2-wire AC input
- Input voltage: 100 – 240VAC @ 47-63Hz
- Output cord length: 6'
- One-year warranty
- Color: black

*Web Code: CBQ

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
251565	ReliaPro	3.3	1500	2.5x1.1x1.7	0.2	$10.95	$9.95	$8.95	$7.49
251600	ReliaPro	3.3	2500	2.9x1.1x1.7	0.3	11.95	10.95	9.95	8.49
2173010	Phihong	5	400	1.9x1.4x0.9	0.1	7.95	6.95	6.25	5.95
252701	ReliaPro	5	500	2.9x1.1x1.7	0.3	10.95	9.95	8.95	7.95
2126125	OEM	5	800	1.9x1.6x0.9	0.1	7.95	6.95	6.25	5.95
1940660	Mean Well	5	1000	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
252720	ReliaPro	5	1000	2.5x1.1x1.7	0.2	8.95	7.95	7.49	6.95
252728	ReliaPro	5	1500	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
210894	ReliaPro	5	2000	2.9x1.4x2.2	0.2	12.95	11.95	10.95	9.95
252736	ReliaPro	5	2500	2.9x1.3x2.2	0.3	14.95	13.49	11.95	10.49
2082222	ReliaPro	5	3000	2.9x1.3x2.2	0.3	9.95	8.95	7.95	6.95
2145078	ReliaPro	6	500	2.5x1.7x1.1	0.3	9.95	8.95	7.95	6.95
1940678	Mean Well	7.5	800	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
252753	ReliaPro	9	500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
1940686	Mean Well	9	660	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
1950841	ReliaPro	9	1000	2.5x1.1x1.7	0.2	12.95	11.49	9.95	8.95
252779	ReliaPro	9	1200	2.9x1.3x2.2	0.3	13.95	12.49	10.95	9.95

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
252786	ReliaPro	9	1500	2.9x1.3x2.2	0.3	$15.95	$14.49	$12.95	$11.49
2173132	ReliaPro	9	2000	2.8x2.0x1.3	0.3	16.95	15.49	13.95	11.49
252795	ReliaPro	12	250	2.5x1.1x1.7	0.2	8.95	7.95	6.95	6.25
252808	ReliaPro	12	500	2.5x1.1x1.7	0.2	8.95	7.95	7.49	6.95
1940694	Mean Well	12	500	2.6x1.3x1.9	0.2	9.49	8.49	7.95	7.49
2150758	ReliaPro	12	500	2.5x1.7x1.1	0.2	7.95	6.95	6.25	5.95
252816	ReliaPro	12	600	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
252824	ReliaPro	12	1000	2.9x1.3x2.2	0.3	12.95	11.49	9.95	8.95
252833	ReliaPro	12	1250	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
2167656	ReliaPro	12	1500	2.9x1.7x1.3	0.3	10.95	9.95	8.95	7.95
1950497	ReliaPro	12	2000	2.9x2.1x1.3	0.4	15.95	14.49	12.95	11.49
254757	ReliaPro	15	800	2.9x1.3x2.2	0.2	12.95	11.49	10.49	9.49
252904	ReliaPro	15	1000	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
252866	ReliaPro	24	500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
2076341	ReliaPro	24	630	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95

CEC

*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

AC-to-DC Regulated Wall Adapters

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Energy Star Worldwide Interchangeable AC-to-DC Regulated Switching Wall Adapters

Meets US and European Energy Star compliance. Approved for European high-efficiency power applications.

*Web Code: NBH

- Field changeable AC Plug Clips **(sold separately, see below)**
- Regulated output • Double insulated
- Input voltage: 90-264VAC @ 47-63Hz • Power-On LED
- Output conn.: 2.1mm x 5.5mm female center positive; except where noted
- Load regulation: ±5% • Class B EMI • Color: black
- Applications: wireless communications, portable equipment, digital camera, peripherals and networking

Phihong & Mean Well AC Plug Clips (below)

Shown w/o AC Plug Clip
AC Plug Clips Not Included

2161570

Wall Adapters (AC Plug Clip required, not included)

Part No.	Manufacturer	Product No.	Output Volt. (VDC)	Current (A)	Power (W)	Ripple (mVp-p)	Line Regulation	Efficiency (%)	Dimensions (L" x W" x H")	Pricing 1	10	50
2161570	ReliaPro	SA050100R1340R**	5	1.0	5	300	±5%	80	2.7 x 1.8 x 0.8	$10.95	$9.95	$8.95
2144809	Phihong	PSA08R-050R†#	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	10.95	9.95	8.95
2139815	Phihong	PSAC05R-050(P)R	5	1.0	5	50	±1%	60 - 75	2.8 x 1.8 x 1.2	9.95	8.95	7.95
2197812	Cincon	TR10RO50R*#	5	1.6	10	50	±1%	65	2.8 x 1.7 x 1.3	11.95	10.95	9.95
2158240	Phihong	PSM11R-050R##	5	2.0	10	100	±5%	70	2.8 x 1.7 x 1.2	9.95	8.95	7.95
2082311	Mean Well	GE18I09-P1JR	9	2.0	18	100	±5%	75	3.2 x 1.7 x 1.6	12.49	11.49	9.95
2138951	Phihong	PSA11R-120	12	0.83	10	120	±1%	65	2.8 x 1.8 x 1.2	9.95	8.95	7.95
2108656	Phihong	PSC12R-120R	12	1.0	12	240	±5%	78	2.8 x 1.8 x 1.2	14.95	13.95	12.95
2154986	ReliaPro	FW75550/12R*	12	1.25	15	150	±5%	80	3.5 x 2.0 x 1.3	15.95	14.95	13.95
2210693	Asian Power	WA-18H12R††	12	1.50	18	120	±2%	80	3.0 x 1.9 x 1.4	14.95	13.95	12.95
2100179	Phihong	PSAA20R-120R	12	1.67	20	120	±5%	81	2.8 x 2.0 x 1.3	17.95	16.95	14.49
2205632	CUI	EMS240025-PSP-SZR*	24	0.25	6	240	±1%	80	2.5 x 1.6 x 1.2	8.95	7.95	6.95
2082345	Mean Well	GE12I24-P1JR	24	0.63	15	240	±3%	80	2.8 x 1.6 x 1.5	9.49	8.49	7.95
2192528	ReliaPro	EA1024KRR*	24	1.25	30	240	±1%	80	2.8 x 1.6 x 1.3	24.95	22.95	19.95

†Includes USA AC plug clip ††Includes US, EU clip #2.5mm x 5.5mm female plug ##Mini USB plug *Kit includes US, UK, EU, AUS plugs **Raspberry Pi adapter

Phihong AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	250
229155	RPAR	USA AC plug only	$1.25	$1.19	$1.09	$.99
229163	RPER	European AC plug only	1.25	1.19	1.09	.99
229181	RPKITR	Kit includes US, EU, UK & AU clips (4)	4.49	4.25	3.95	3.59

Mean Well AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	10
2082353	AC-Plug-USR	USA AC plug only	$.89	$.85
2082361	AC-Plug-EUR	European AC plug only	.99	.89
2082396	AC-Plug-MIXR	Kit includes US, EU, UK & AU clips (4)	3.95	3.49

AC-to-DC Regulated Linear Wall Adapters

*Web Code: WAZ

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

1953639

◆ Polarity 1 ⊕—•—⊖ (center negative)
Polarity 2 ⊖—•—⊕ (center positive)
Female(F) Male(M)

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	10	50	100
164101	ReliaPro	GPU410500500WD00	5	500	2.1mm x 5.5mm F 2	120 @ 60	3.1 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	$10.95	$9.95	$8.95	$7.95
319986	ReliaPro	DV-580R	5	800	2.5mm x 5.5mm F 2	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	7.49	6.49	5.49	4.49
2081609	Condor	RWP480505	5	1000	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	7.95	6.95	5.95	4.95
168605	ReliaProR	DBU0501000	5	1000	2.5mm x 5.5mm F 2	120 @ 60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
190512	ReliaProR	DBU60020-H3570	6	200	2.1mm x 5.5mm F 2	120 @ 60	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	9.95	8.95	7.95	6.95
283573	ReliaPro	ADR-6V500MA-2.1	6	500	2.1mm x 5.5mm F 2	120 @ 60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	10.95	9.95	8.95	7.95
190529	ReliaProR	AD9123	9	250	2.5mm x 5.5mm right angle F 2	120 @ 60	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CUL	10.95	9.95	8.95	7.95
1953639	ReliaProR	DCU09050	9	500	2.1mm x 5.5mm F 2	120 @ 60	2.4 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
1953647	ReliaProR	SF41-0900500RU	9	500	2.5mm x 5.5mm F 2	120 @ 60	3.0 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
220898	ReliaProR	DCU120020	12	200	2.1mm x 5.5mm F 1	120 @ 60	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	6.25
162996	ReliaProR	DDU120050	12	500	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
170245	ReliaPro	RDU120100	12	1000	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
1953663	ReliaProR	DCU1201000	12	1000	2.5mm x 5.5mm F 2	120 @ 60	3.3 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
174861	ReliaProR	DFU240050	24	500	2.1mm x 5.5mm F 2	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95
174879	ReliaProR	DCU090025	24	500	2.5mm x 5.5mm F 2	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95

Portable Li-Ion Power Banks

Recharge the power bank via 5V USB micro-B. 4-in-1 multi-use USB cable included to charge iPhone/iPod/iPad, iPhone5/iPad (Lightning) and USB micro-B.

*Web Code: XEL



Part No.	Mfr. Part No.	Output	mAh	Color	1	5
2192595	KSLP26-BKR	5V @ 1A	2600	Black	$19.95	$17.95
2192616	KSLP26-BLR	5V @ 1A	2600	Blue	19.95	17.95
2192608	KSLP26-PKR	5V @ 1A	2600	Red	19.95	17.95
2192587	KSLP26-WTR	5V @ 1A	2600	White	19.95	17.95
2192624	MTXL78-BKR*	5V @ 1A/2A	7800	Black	34.95	29.95
2205376	PWUSB002R	4-in-1 cable	—	White	9.95	8.49

*Built-in LED flashlight

APPLE CONNECTOR ADAPTERS

Keep your old chargers and cables and still be able to connect to or charge almost any mobile device with these convenient adapters.

Part No.	Description	1	5
2196094	USB micro-B to iPhone/iPod (30-pin)	$2.95	$2.65
2196060	USB micro-B to Lightning (iPhone5/iPad4)	2.95	2.65
2196078	iPhone/iPod to iPhone5/iPad4 (Lightning)	2.95	2.65

R RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

JAMECO ReliaPro

AC-to-DC Unregulated Linear Wall Adapters

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

★Web Code: UAP

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

2099921

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2126109	ReliaPro	K12D045025023U	4.5	250	2.1mm x 5.5mm F **2**	2.3 x 1.5 x 1.4	Black	6'	0.3	UL/CUL	$3.95	$3.49	$2.95	$2.59
112070	ReliaPro	DBU05002Z5480	5	225	2.5mm x 5.5mm F **2**	1.9 x 2.2 x 2.0	Black	7'	0.3	UL/CUL	5.95	5.49	4.95	4.49
155601	ReliaPro	DCU050100B3582	5	1000	2.1mm x 5.5mm F **2**	2.6 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
2179745	DVE	DV-6100-3508	6	100	2.1mm x 5.5mm F **1**	2.4 x 1.5 x 1.0	Black	6'	0.3	UL/CUL	3.95	3.49	2.95	2.49
2099551	Fuhue	UE-3560300D	6	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
101266	ReliaPro	DBU060050E3860	6	500	2.1mm x 5.5mm F **2**	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CUL	6.95	6.25	5.59	4.95
147707	ReliaPro	DBU060080C6962	6	800	2.1mm x 5.5mm F **2**	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
220943	ReliaPro	DCU060120G2401	6	1200	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
220951	ReliaPro	DCU075100G2291	7.5	1000	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	6.95	5.95	5.49	4.95
134025	ReliaPro	DBU090020Z6100	9	200	2.1mm x 5.5mm F **1**	2.1 x 1.7 x 1.6	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
2100152	ReliaPro	AP2911	9	200	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	3.95	3.49	2.95	2.59
100845	ReliaPro	DBU090020E0850	9	200	2.1mm x 5.5mm F **2**	2.1 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.59
2082556	ReliaPro	5-2616	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Black	6'	0.5	UL/CUL	3.95	3.49	2.95	2.59
2082548	Atlinks	5-2617	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Gray	6'	0.5	UL/CUL	2.95	2.49	1.95	1.75
2138847	ReliaPro	D6300-01	9	200	2.5mm M **2**	2.2 x 1.7 x 1.4	Black	6'	0.4	UL/CSA	3.95	3.49	2.95	2.59
133891	ReliaPro	DBU090030C112	9	300	2.1mm x 5.5mm F **2**	2.0 x 1.5 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
318676	ReliaPro	DBU090030H5790	9	300	2.5mm x 5.5mm F **1**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
189238	ReliaPro	DBU090030H4540	9	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	4.95	4.49
163628	ReliaPro	DCU090050Z7484	9	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
100853	ReliaPro	DCU090050E2961	9	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
236937	ReliaPro	DCU090050G6440	9	500	2.5mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	7.95	6.95	6.25	5.49
15561	ReliaPro	DCU090050A2011	9	500	3.5mm M **2**	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	7.95	6.95	6.25	5.49
202180	ReliaPro	DCU090060F2091	9	600	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
100175	ReliaPro	DCU090060Z6652	9	600	2.5mm x 5.5mm F **2**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
2192704	ReliaPro	TEAD-41-090800U	9	800	2.1mm x 5.5mm F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	5.95	4.95
164929	ReliaPro	DDU090100C2550	9	1000	2.1mm x 5.5mm F **1**	2.7 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2179542	ReliaPro	ADP2108GT	9	1000	2.1mm x 5.5mm right angle F **2**	2.6 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	7.95	6.95	5.95	5.49
364576	ReliaPro	DDU090100J0490	9	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2099921	ENG Electric	T48-9-1000D4*	9	1000	2.5mm x 5.5mm F **1** (UK plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	2.95	2.49	1.95	1.59
127505	ReliaPro	DDU090100	9	1000	2.5mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
130526	ReliaPro	DDE090120F3621	9	1200	2.1mm x 5.5mm F **1**	2.4 x 2.0 x 1.8	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	6.95
100095	ReliaPro	DBU120020	12	200	2.1mm x 5.5mm F **2**	2.1 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
158043	ReliaPro	DBU120020E2261	12	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
127976	ReliaPro	DCU120030D7161	12	300	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	5.95	4.95
114825	ReliaPro	DCU120050D4740	12	500	Stripped & tinned	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
15368	ReliaPro	DCU120050Z8698	12	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
102496	ReliaPro	DCU120050E8601	12	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
102277	ReliaPro	DCU120050UE2631	12	500	2.5mm x 5.5mm F **2**	2.5 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
17267	ReliaPro	DCU120050Z5391	12	500	3.5mm M **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
2167365	ReliaPro	A31265	12	600	2.1mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CSA	6.95	6.49	5.95	5.49
202219	ReliaPro	DCU120070F2142	12	700	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	7.29	6.49
2188473	Motorola	503913-007	12	750	2.5mm x 5.5mm F **2**	2.7 x 1.7 x 1.2	Black	6'	0.2	UL/CUL/CEC	7.49	6.95	6.25	5.49
117479	ReliaPro	DDU120080E6451	12	800	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
129331	ReliaPro	DDU120080F2412	12	800	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
121232	ReliaPro	DDU120080F2271	12	800	3.5mm M **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
2197484	ReliaPro	DDU120100	12	1000	2.1mm x 5.5mm F **2**	2.6 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	6.25
100870	ReliaPro	DDU120100Z7974	12	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	7.29
2179770	Westell	585-200071**	12	1000	2.5mm x 5.5mm F **2**	2.9 x 1.6 x 1.2	Black	6'	0.2	UL/CEC	8.95	7.95	6.95	6.25
105478	ReliaPro	DDU120100Z2993	12	1000	2.5mm x 5.5mm F **2**	3.1 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
15392	ReliaPro	DDU120100E7302	12	1000	3.5mm M **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
196779	ReliaPro	DDU120120G0031	12	1200	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2192747	ReliaPro	MW48-1201250	12	1250	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	6.95
203036	ReliaPro	DDU120150H4530	12	1500	2.1mm x 5.5mm F **1**	3.3 x 2.2 x 1.9	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
136881	ReliaPro	DDU120150K1960	12	1500	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
101291	ReliaPro	DDU120150	12	1500	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
2173028	ENG	57-12-2000D	12	2000	2.1mm x 5.5mm F **2**	3.4 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	9.49
308099	ReliaPro	DDU135100H3210	13.5	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
123932	ReliaPro	DDU140070Z7470	14	700	2.1mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25

* 240VAC 50Hz ** Slimline CEC

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

AC-to-DC Unregulated Linear Wall Adapters (Continued)

★Web Code: UAP

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.


Female | Male | Female Right Angle

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

123158

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2172720	Globtek℞	WD1G500CCP-N	15	500	2.1mm x 5.5mm F **2**	3.2 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	$6.95	$5.95	$5.49	$4.95
190001	ReliaPro℞	DCU150050E3021	15	500	2.1mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
189982	ReliaPro	DCU150050E3031	15	500	2.5mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
203502	ReliaPro	DDU150090F4480	15	900	2.5mm x 5.5mm F **2**	2.6 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	5.95	4.95	4.49	3.95
191652	ReliaPro℞	DDU150100D7051	15	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2167525	ReliaPro℞	DDU150100RR2200	15	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
217541	NiteRider	FE4116168C030	16.8	300	2.5mm x 5.5mm F **2**	3.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	2.49	1.95	1.59	1.25
2081713	DVE	DV-1790	17	900	2.5mm x 5.5mm F **2**	3.2 x 2.2 x 2.0	Black	6'	1.2	UL/CSA	2.49	1.95	1.59	1.25
163272	ReliaPro	DDU180050C1031	18	500	2.1mm x 5.5mm F **2**	2.6 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	6.95	5.95	4.95	4.49
2205261	ReliaPro℞	DDU180100H4550	18	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
206958	ReliaPro	DDU180100H4551	18	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
102285	ReliaPro℞	DDU240040Z7860	24	400	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.29	6.49
163635	ReliaPro℞	DDU240050C1981	24	500	2.1mm x 5.5mm F **1**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.29
2192510	ReliaPro℞	DDU240050RS1160	24	500	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
191556	ReliaPro℞	DDU240050E5852	24	500	2.5mm x 5.5mm F **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
139088	ReliaPro	DDU240050E9160	24	500	3.5mm M **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
2192641	Ault℞	P48240600A030G	24	600	2.1mm x 5.5mm F **2**	2.9 x 2.2 x 1.9	Black	6'	1.3	UL/CSA	7.95	6.95	5.95	4.95
168495	ReliaPro℞	DFU240080J3180	24	800	2.1mm x 5.5mm F **2**	2.9 x 1.9 x 1.6	Black	6'	0.4	UL/CUL/TUV	11.95	10.95	9.95	8.95
220960	ReliaPro℞	DFU240100G2300	24	1000	2.1mm x 5.5mm F **1**	3.4 x 2.7 x 2.2	Black	6'	1.6	UL/CUL	14.95	13.49	11.95	9.95
249121	ReliaPro℞	DFU240120/G8520	24	1150	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	14.49	12.95
249113	ReliaPro	DFU240120/G8510	24	1150	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	14.49	12.95
199523	ReliaPro	DDU300050E9340	30	500	2.5mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	10.95	9.95	8.95	7.95
15309	ReliaPro℞	900-051	3, 4.5, 6, 7.5, 9, 12	500	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.0 x 2.2 x 2.1	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	6.95
2167621	Seven Star	SS104*	1.5, 3, 4.5, 6, 7.5, 9, 12	500	0.7x2.3, 1.5x4, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male** (LED indicator)	3.3 x 2.0 x 1.9	Black	6'	0.8	—	7.95	6.95	5.95	4.95
123158	ReliaPro℞	900-100*	1.5, 3, 4.5, 6, 7.5, 9, 12	1000	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.7 x 2.2 x 2.5	Black	6'	0.9	—	11.95	10.95	9.95	8.95

*110/220VAC input voltage

AC-to-DC GSM90 Series Medical Table-Top Switching Power Supplies

★Web Code: DDZ

- **2.5mm x 5.5mm female center positive**
- Input voltage: 80-264VAC @ 47-63Hz, 113-370VDC
- Leakage current: less than 100µA max.
- High efficiency up to 91% • Built-in active PFC function
- Short-circuit, overload, over-voltage and over-temperature protection • Class II power
- AC cord not included (recommend P/N 189587, below)
- Size: 5.71"L x 2.36"W x 1.26"H

NEW MARKED IN PINK

Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing 1	Pricing 10
2210466	GSM90B12-P1M℞	80	+12/6.67	$39.95	$36.95
2210474	GSM90B15-P1M℞	90	+15/6.0	39.95	36.95
2210482	GSM90B19-P1M℞	90	+19/4.74	39.95	36.95
2210491	GSM90B24-P1M℞	90	+24/3.75	39.95	36.95
2210503	GSM90B48-P1M℞	90	+48/1.87	39.95	36.95

GlobTek® AC-to-DC Medical Table-Top Regulated Switching Power Supplies

★Web Code: WBM

- **2.5mm x 5.5mm female center positive**
- Input voltage: 90-264VAC @ 47-63Hz
- Leakage current: 0.1mA max.
- Regulation (line & load): ±5%
- Isolation voltage: 4,000VAC • 3-wire AC input
- Ripple & noise: 1% or 100mV, whichever is smaller
- Cord lengths: DC: 6'; AC: not included use P/N 132011 (see Web)
- Size: 2.9"L x 2.0"W x 1.6"H

Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing 1	Pricing 10	Pricing 50
2179606	TR9CB2500LCP℞	15.0	+6/2.5	$24.95	$22.95	$19.95
230683	TR9CE1250CP℞	15.6	+12/1.3	34.95	29.95	24.95
230763	TR9CE4000LCP	49.2	+12/4.1	54.95	49.95	45.95
230798	TR9CI2100LCP	50.4	+24/2.1	59.95	53.95	47.95

★Interchangeable Power Supplies, Adapters and Tips — Enter Web Code NBH

Accessory Power Input Cords for Table-Top Power Supplies

★Web Code: UBF

189587

38050

1951123

Part No.	Ref. No.*	Description	Color	AWG	Certification	Cord Length	Wt. (lbs.)	Cord Type	1	10	50	100
189587	1	2-conductor power cord (Figure 8 style)℞	Black	18/2	UL/CSA	6'	0.3	SPT	$2.95	$2.69	$2.39	$2.19
38050	2	3-conductor power cord℞	Black	18/3	UL/CSA	6'	0.4	SVT	4.95	4.49	3.95	3.59
1953559	3	3-conductor flat power cord (Mickey Mouse™ style)	Black	18/3	UL/CSA	6'	0.4	SPT-2	2.59	2.25	1.95	1.59
1951123	3	3-conductor round power cord (Mickey Mouse™ style)℞	Black	18/3	UL/CSA	6'	0.4	SVT	2.95	2.59	2.29	1.95

*These reference numbers for "AC cord needed" for Table-Top Power Supplies on pages 7-9

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Unregulated Linear & Regulated Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

2155006

2099569

1940299

2155321

309876

◆ Polarity 1 (center negative)
Polarity 2 (center positive)

Female (F)

Male (M)

DIN (M)

Stripped

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
2-Wire AC Input – Unregulated Linear Table-Top												★Web Code: TBE	
2155006	Lite-On	PB-1090-1L1	+12/0.75	2.5mm x 5.5mm F 2	120@60	9	No	3.2 x 2.2 x 1.9	6'/6'	1.1	UL/CUL	$7.95	$6.49
2192712	OEM	AD-121ADT	+12/1.0	2.1mm x 5.5mm F 2	120@60	12	No	3.2 x 2.2 x 1.8	6'/6'	1.4	UL/CUL	9.95	8.95
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6'/6'	1.5	UL	12.95	11.95
143715	ReliaPro	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.95
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.95
143731	ReliaPro	DC1220M3	+12/2.0	3.5mm M 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	1.9	UL/CUL	14.95	13.49
2197898	ReliaPro	MKD66123400	+12/3.4	5-pin DIN M	120@60	40	No	5.1 x 3.6 x 2.6	6'/6'	3.0	UL/CUL	19.95	17.95
2099569	ReliaPro	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6'/6'	1.3	UL	3.95	3.49
174845	ReliaPro	GQ-ADT57250-0044	+24/1.0	2.1mm x 5.5mm F 2	120@60	24	No	3.4 x 2.6 x 2.2	6'/6'	2.6	UL	14.95	13.95
139096	ReliaPro	EHU240120	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	15.95	14.95
2197572	ReliaPro	EHU240200	+24/2.0	2.1mm x 5.5mm F 2	120@60	48	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	19.95	17.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ	
1940299	Mean Well	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	4'/ 1	0.5	UL/CUL/TUV/CE	$11.95	$10.95
191353	Delta	ADP-15FB	+12/1.25	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.5 x 2.3 x 1.2	6'/ 1	0.5	UL/CE	7.95	6.95
1940328	Mean Well	GS18B12-P1JT	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6'/6'	0.5	UL/CUL/TUV/CE	11.95	10.95
2167445	ReliaPro	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.6 x 1.6 x 1.1	5'/ 1	0.4	UL/CUL/CE/CSA	19.95	18.95
2155321	ReliaPro	PA1045-120T2B375-APF02	+12/3.75	2.1mm x 5.5mm F 2	90-264@50-60	45	Yes	4.3 x 2.1 x 1.2	6'/ 1	0.5	UL/CUL/TUV/CE	22.95	20.49
2155330	ReliaPro	PA1045-120T2B375-APF04	+12/3.75	2.5mm x 5.5mm F 2	90-264@50-60	45	Yes	4.3 x 2.1 x 1.2	6'/ 1	0.5	UL/CUL/TUV/CE	22.95	20.49
1940521	Mean Well	GS25B15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.1 x 2.1 x 1.3	6'/ 1	0.5	UL/CUL/TUV/CE	11.95	10.95
1940547	Mean Well	GS25B24-P1J	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/ 1	0.5	UL/CUL/TUV/CE	11.95	10.95
221613	Mean Well ✓	P30B-6P2JT	+24/1.12	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	9.95	9.49
1707139	Mean Well	ES25B48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/ 1	0.4	UL/CUL/TUV/CE	12.95	11.95
2-Wire AC Input – Regulated Switching Table-Top – Triple Output												★Web Code: TTO	
196138	DVE	DSA-0283A	+5/1, +12/1.49 -5/0.43 (Requires 20% min. load on all outputs)	5-pin DIN M	100-240@47-63	23	No	4.9 x 2.7 x 1.5	6'/ 1	0.8	UL/CSA/TUV	$3.95	$3.59
3-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ	
309876	ReliaPro	GI12-USO520	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	2.6 x 1.9 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	$11.95	$10.95
196218	GlobTek	GT-21089-1305T3	+5/2.0	2.1mm x 5.5mm F 2	120-240@50-60	10	No	3.4 x 1.9 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	15.95	14.49
1955642	Delta	ADP-105B	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	3.3 x 1.9 x 1.2	6'/ 2	0.3	UL/CUL/CE	4.95	4.49
2115506	OEM	SYS1089-1305-T3	+5/2.6	2.1mm x 5.5mm F 2	100-240@50-60	13	No	3.4 x 1.8 x 1.3	6'/ 2	0.3	UL/CUL/CE	6.95	5.95
1940387	Mean Well	GS18A05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	Yes	3.7 x 2.1 x 1.4	4'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940571	Mean Well	GS25A05-P1J	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.7 x 2.1 x 1.4	4'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
1952337	Mean Well	GS40A05-P1JU	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	4'/ 2	0.7	UL/CUL/TUV/CE	15.95	14.49
2135700	Condor	HK-D530-A05	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	No	4.7 x 2.1 x 1.3	8'/ 2	0.5	UL/CUL/TUV/CE	14.95	13.49
320081	GlobTek	TR9CA6000LCP-Y	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	4.7 x 2.4 x 1.3	6'/ 2	0.7	UL/CUL/TUV/CE	39.95	35.95
2144956	ReliaPro	GQ65-060330-EI	+6/3.3	2.1mm x 5.5mm F 2	100-240@50-60	20	No	3.6 x 2.0 x 1.3	6'/ 3	0.3	UL/TUV/CE	17.95	15.95
206529	Mean Well	GS40A07-P1J	+7.5/5.34	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.9 x 2.0 x 1.3	4'/ 2	1.5	UL/CUL/TUV/CE	15.95	14.49
2103118	Mean Well	GS60A07-P1J	+7.5/6.0	2.1mm x 5.5mm F 2	90-264@47-63	45	Yes	4.9 x 2.0 x 1.2	3.3'/ 2	0.7	UL/CUL/TUV/CE	17.95	15.95
2173036	Phihong	PSA18U-090	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.9 x 2.2 x 1.2	5'/ 2	0.5	UL/CUL/TUV/CE	9.95	8.95
1940408	Mean Well	GS18A09-P1J	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.6	UL/CUL/TUV/CE	11.95	10.95
2102916	Mean Well	GS40A09-P1J	+9/4.5	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/ 2	0.6	UL/CUL/TUV/CE	15.95	14.49
1952361	Mean Well	GS60A09-P1J	+9/6.0	2.1mm x 5.5mm F 2	90-264@47-63	54	Yes	4.9 x 2.0 x 1.3	4'/ 2	0.7	UL/CUL/TUV/CE	17.95	15.95
2150782	ReliaPro	GQ65-120100EI	+12/1.0	2.1mm x 5.5mm F 2	100-240@50-60	12	No	3.6 x 1.9 x 1.3	6'/ 2	0.3	TUV(US)/TUV/CE	12.95	11.95
1954244	Mean Well	GS15A-3P1J	+12/1.25	2.1mm x 5.5mm F 2	90-264@47-63	15	No	3.9 x 2.3 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	13.95	12.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

✓CEC Equivalent available. Add a "C" before part number for CEC version. CEC

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

AC-to-DC Regulated Switching Table-Top Power Supplies

◆ Polarity 1 (center negative)
Polarity 2 (center positive)

Female (F)

Female Right Angle

DIN (M)

4-Pin Molex

We are happy to change the power plug on any listed table-top power supply to a connector of your choice for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
3-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)												★Web Code: DDZ	
1940416	Mean Well	GS18A12-P1JU	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	$11.95	$10.95
2135507	SPC Technology	SA121A6F-11	+12/1.6	2.1mm x 5.5mm F 2	100-250@47-63	19	No	3.2 x 2.2 x 1.9	6'/ 2	0.2	UL/CUL/TUV/CE	8.95	7.95
2135515	SPC Technology	SA122A0U-11	+12/2.0	2.1mm x 5.5mm F 2	100-250@47-63	24	No	3.2 x 2.2 x 1.9	6'/ 2	0.2	UL/CUL/TUV	9.95	8.95
2099868	DVE	DSA-0421S	+12/2.0	2.1mm x 5.5mm F 2	100-240@50-60	24	Yes	3.7 x 2.2 x 1.3	6'/6'	0.4	UL/CUL/TUV/CE	9.95	8.95
2197601	Delta	EADP-24KBB	+12/2.0	2.1mm x 5.5mm F 2†	100-240@50-60	24	No	4.7 x 2.0 x 1.2	7'/6'	0.5	UL/CUL/CE	10.95	9.95
1940601	Mean Well	GS25A12-P1JU	+12/2.08	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	4'/6'	0.5	UL/CUL/TUV/CE	11.95	10.95
2190047	Mean Well	GS25A12-P1J	+12/2.08	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	4'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
2154978	ReliaPro	GQ65120250-E1	+12/2.5	2.5mm x 5.5mm F 2	100-240@50-60	30	No	3.6 x 1.9 x 1.3	6'/ 2	0.5	TUV(US)/CE	15.95	14.95
2129158	Sparkle Power	FSP040-DGAA1	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.0 x 1.2	5'/ 2	0.5	UL/CUL/TUV/CE	20.95	18.95
1952345	Mean Well	GS40A12-P1J	+12/3.34	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/ 2	0.7	UL/CUL/TUV/CE	15.95	14.49
2079357	Mean Well	GS40A12-P1M	+12/3.34	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/ 2	0.7	UL/CUL/TUV/CE	15.95	14.49
1940264	ReliaPro	EA1050E	+12/3.5	2.1mm x 5.5mm F 2	100-240@50-60	42	Yes	4.7 x 2.4 x 1.4	4'/ 2	0.6	UL/CUL/TUV/CE	14.95	13.95
1940272	ReliaPro	GQ65-120416-EI	+12/4.16	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.5 x 1.9 x 1.4	4'/ 2	0.6	TUV(US)/CE	18.95	17.95
2158485	Power-One	3F42050	+12/4.2	2.1mm x 5.5mm F 2†	100-240@50-60	50	Yes	4.7 x 2.4 x 1.4	6'/6'	1.2	UL/CUL/CE	13.95	12.95
2129609	Phihong	PSA65U-120	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	No	5.9 x 2.8 x 1.5	3.3'/ 2	1.0	UL/CUL/CE	15.95	13.49
2172771	ReliaPro	EA1050A-120	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.7 x 2.4 x 1.4	4'/ 2	0.7	UL/CUL/TUV/CE	16.95	14.95
1952370	Mean Well	GS60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 1.9 x 1.2	4'/ 2	0.7	UL/CUL/TUV/CE	17.95	15.95
2099420	Sparkle Power	AD060DBAEI-J25R	+12/5.0	2.5mm x 5.5mm F 2†	100-240@50-60	60	Yes	4.3 x 2.4 x 1.2	5'/ 2	0.5	UL/CUL/TUV/CE	27.95	24.95
2078291	Mean Well	GS90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	100-240@50-60	80	Yes	5.7 x 2.3 x 1.3	4'/ 2	0.9	UL/CUL/TUV/CE	28.95	25.95
221429	Mean Well	U65S105-P2JU	+12/6.7	2.1mm x 5.5mm F 2	100-240@50-60	80	Yes	6.6 x 3.1 x 1.8	6'/6'	2.0	UL/CUL/TUV/CE	41.95	38.95
2129211	Mean Well	GS120A12-R7B	+12/8.5	4-pin DIN M	85-264@47-63	102	Yes	6.6 x 2.6 x 1.4	4'/ 2	1.4	UL/CUL/TUV/CE	43.95	39.95
2205165	ReliaPro	EA11011H-120	+12/10	4-pin DIN M	100-240@47-63	120	Yes	5.4 x 2.3 x 1.3	4'/ 2	2.4	UL/CUL/CB/CE	46.95	42.95
2099294	Mean Well	GS220A12-R7B	+12/15	4-pin DIN M	90-264/127-370@47-63	180	Yes	8.3 x 3.4 x 1.8	3.3'/ 2	1.0	UL/CUL/TUV/CE	74.95	67.95
2139006	ENG Electric	3G-301DN13	+13.5/2.2	4-pin Molex	100-240@50-60	30	No	4.6 x 1.9 x 1.2	2'6"/5'	0.8	UL/CUL	7.95	6.95
1940432	Mean Well	GS18A15-P1JU	+15/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940619	Mean Well	GS25A15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
221577	Mean Well	GS40A15-P1J	+15/2.67	2.1mm x 5.5mm F 2	90-264@50-60	40	Yes	4.9 x 2.0 x 1.3	6'/ 2	0.8	UL/CUL/TUV/CE	15.95	14.49
2171559	Mean Well	GS40A15-P1JU	+15/2.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/6'	0.6	UL/CUL/TUV/CE	17.95	15.49
1954295	Mean Well	GS60A15-P1J	+15/4.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	4'/ 2	0.7	UL/CUL/TUV/CE	17.95	15.95
2078320	Mean Well	GS90A15-P1M	+15/6.0	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.7 x 2.3 x 1.3	3'3"/ 2	0.8	UL/CUL/TUV/CE	28.95	25.95
2145107	SYN Electronics	SYS-1097-4018	+18/2.2	2.1mm x 5.5mm F 2	100-240@47-63	40	Yes	4.7 x 2.4 x 1.3	4"/ 2	0.7	UL/TUV/CE	12.95	11.49
2154951	Mean Well	GS60A18-P1JU	+18/3.33	2.1mm x 5.5mm F 2	90-264@50-60	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	17.95	15.95
1940459	Mean Well	GS18A24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940635	Mean Well	GS25A24-P1JU	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	12.95	11.95
380577	Mean Well	ES25A24-P1MU	+24/1.04	2.5mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.6	UL/CUL/TUV/CE	19.95	17.95
2172789	ReliaPro	EA1030D1	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.8 x 1.7 x 1.2	6'/6'	0.4	UL/CUL/TUV/CE	15.49	14.95
1952353	Mean Well	GS40A24-P1J	+24/1.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	6'/ 2	0.7	UL/CUL/TUV/CE	15.95	14.49
1537256	ReliaPro	0H-1048A2401700U-U	+24/1.7	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.5 x 2.0 x 1.3	6'/ 2	0.5	UL/CUL/CE	15.95	14.49
1942788	ReliaPro	EA1050B-240	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6'/ 2	1.8	UL/CUL/TUV/CE	17.49	15.49
1952214	Mean Well	GS60A24-P1J	+24/2.5	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.3	6'/ 2	0.7	UL/CUL/TUV/CE	17.95	15.95
1950913	ReliaPro	EA1050B-240	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6'/ 2	1.8	UL/CUL/TUV/CE	18.49	16.95
2172797	ReliaPro	EA11001D-240	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.4 x 2.3 x 0.4	4'/ 2	0.9	UL/CUL/TUV/CE	27.95	24.95
2078338	Mean Well	GS90A24-P1M	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.9 x 2.3 x 1.2	4'/ 2	0.9	UL/CUL/TUV/CE	28.95	25.95
2135208	Mean Well	GS120A24-P1M	+24/5.00	2.5mm x 5.5mm F 2	85-264@47-63	120	Yes	6.6 x 2.6 x 1.4	4'/ 2	1.4	UL/CUL/TUV/CE	43.95	39.95
2122212	Mean Well	GS160A24-R7B	+24/6.67	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/ 2	1.5	UL/CUL/TUV/CE	54.95	49.95
2099286	Mean Well	GS220A24-R7B	+24/9.2	4-pin DIN M	90-264@47-63	220	Yes	8.3 x 3.4 x 1.8	3.3'/ 2	2.4	UL/CUL/TUV/CE	74.95	67.95
1940643	Mean Well	GS25A28-P1JU	+28/0.89	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.7	UL/CUL/TUV/CE	11.95	10.95
1940651	Mean Well	GS25A48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95
172065	Mean Well	SPU50-9U	+48/1.25	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	5.6 x 2.9 x 1.7	6'/6'	1.3	UL/CUL/TUV/CE	14.95	13.95
1952396	Mean Well	GS60A48-P1JU	+48/1.25	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.7	UL/CUL/TUV/CE	17.95	15.95
2122221	Mean Well	GS160A48-R7B	+48/3.34	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/ 2	1.5	UL/CUL/TUV/CB/CE	54.95	49.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord † Right angle CEC

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Table-Top Power Supplies (Continued)

We are happy to change the power plug on any listed table-top power supply to a connector of your choice for just $2.50 each. A 100 pc. minimum order applies.
Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

See page 13 for International Power Cords

DIN (M)

190960

221702

237367

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
3-Wire AC Input – Regulated Switching Table-Top – Double & Triple Output												★Web Code: TDO	
196270	ReliaPro	PSU25A13	+5/2.5, +12/1.0	4-pin mini DIN M	100-240@47-63	25	No	4.2 x 2.6 x 1.4	6'/4'	1.2	UL/CUL/TUV/CE	$34.95	$31.49
190960	Mean Well	P25A13D-R1B	+5/2.5, +12/0.8 -12/0.3	5-pin DIN M	100-240@50-60	26	Yes	4.1 x 2.6 x 1.4	6'/ 2	1.1	CUL/TUV/CE	29.95	26.95
221702	Mean Well	P50A13D-R1BU	+5/4.0, +12/2.0 -12/0.5	5-pin DIN M	100-240@50-60	50	Yes	5.7 x 3.0 x 1.7	4'/6'	1.5	UL/CUL/TUV/CE	49.95	44.95
237367	Mean Well	P50A14E-R1B	+5/3.5, +15/1.2 -15/0.3	5-pin DIN M	100-240@47-63	42	Yes	5.8 x 3.0 x 1.7	4'/ 2	1.2	UL/CUL/TUV/CE	44.95	39.95

*See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

5VDC @ 200mA Wall USB Adapter

- Works with digital camera, cell phones, PDA, MP3 and other USB devices • LED indicator
- TUV/FCC approved • Output voltage: 5VDC @ 200mA
- Input volt.: 100-240VAC @ 50/60Hz
- Size: 2.5"H x 1.5"W x 0.8"D • Cable and tips use P/N 2081625 (right)

Part No.	Mfr. Part No.	1	10	50	100
2138636	SW013US-0500020US	$3.95	$3.49	$2.95	$2.59

USB-A Power Cable w/ Interchangeable Tips

- 4' cable • 26 AWG
- USB-A male connector • UL/CSA approved
- Tips: 1.3mm x 5.5mm, 1.5mm x 4.8mm, 1.7mm x 4.8mm, 2.1mm x 5.5mm, 2.5mm x 5.5mm, 2.9mm x 6.3mm, 1.3mm x 3.3mm and 1.3mm x 4.3mm **female**
- For use with P/N 2138636 wall adapters (left)

Part No.	Cross Ref. No.	1	10	50	100
2081625	USBAC8	$5.95	$4.95	$4.49	$3.95

Regulated Desktop/Benchtop Power Supply

This is a high powerd, regulated power supply that is perfect for hobbyists. Typical applications are model railroads, slot car racing, science projects and other applications requireing 12V @ 24A power source. Features output connections heavy duty binding posts or cigarette lighter plug with a 2.1mm x 5.5mm female plug.

NEW MARKED IN PINK

- Input voltage: 100VAC to 240VAC @ 50-60Hz • CUL/UL recognized
- Includes: 6' IEC power cord, 6' coiled cigarette lighter plug cord with a 2.1mm x 5.5mm right angle female plug • Max. output voltage: 12V @ 24A

Part No.	Mfr. Part No.	Size (L x W x H)	Weight	1	5	25
2197599	PS24B	14.5" x 6" x 3.5"	9 lbs.	$69.95	$64.95	$55.95

5VDC @ 500mA Wall USB Adapters

NEW MARKED IN PINK

2197644

2197652

- Works with digital camera, cell phones, PDA, MP3 and other USB devices
- Flip up prongs • UL/FCC approved
- Output voltage: 5VDC @ 500mA
- Input voltage: 100-240VAC @ 50/60Hz
- Cable and tips use P/N 2081625 (above)

Part No.	Mfr. Part No.	Size (H x W x D)	1	10	50	100
2197644	FEF0500050AIBU	2.2" x 1.5" x 1.1"	$4.95	$3.95	$3.49	$2.95
2197652	GFP051-0505-1	2.5" x 1.9" x 0.9"	4.95	3.95	3.49	2.95

60 to 350-Watt PC Power Supplies

★Web Code: HCA

1955941

2081887

2110422

427928

2172754

†† 80 Plus Energy Efficient

AT Power Supplies

Part No.	Mfr.	Mfr. Part No.	Power (W)	Output (VDC/Amps)	Input (VAC @ Hz)	Input Connector (Mating Connector/Cord)	Certification	Size (L" x W" x H")	Wt. (lbs)	Pricing 1	Pricing 5	Pricing 25
2188596	G-Power	GP-4200PB	200	+5/20, -5/0.5, +12/8, -12/0.5	100-240 @ 50-60 switchable	3-prong AC receptacle (P/N 38050, pg 14)	UL/CSA/TUV	6.0 x 6.0 x 3.4	3.0	$39.95	$34.95	$29.95
2208219	Sparkle	SPI-300G-B (no plug)	300	+5/30, -5/0.5, +12/12, -12/0.5	100-240 @ 50-60 switchable	3-prong AC receptacle (P/N 38050, pg 14)	UL/CSA/TUV FCC	5.5 x 5.9 x 3.4	3.5	64.95	59.95	54.95

ATX Power Supplies

1955941	Magic Power Tech	MPI-806H*	60	+3.3/6, +5/8, +12/3, +5VSB/0.75, -12/0.5	90-264 @ 47-63 switching	Connector CN1-CN3	UL/CB/TUV	5.0 x 3.1 x 1.5	1.0	$89.95	$84.95	$79.95
2081887	Enhance	ENP-0185T*	150	+3.3/7, +5/12, +12/5, +5VSB/0.8, -5/0.2, -12/0.3	200-240 @ 50	3-prong AC receptacle (P/N 38050, pg 14)	CUL/TUV/CE	7.5 x 3.3 x 1.7	2.5	6.95	6.25	5.59
2110422	Sparkle	SPI2501UH-B204* †	250	+3.3/16 +5/18, +12v1/16, +12v2/16 -12/0.8, -5/0.3, +5VSB/2.5	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 14)	UL/CSA/TUV/ CE/CB††	7.5 x 3.9 x 1.6 (1U)	2.9	79.95	69.95	64.95
427928	Seasonic	SS-300SFD Active PFC* †	300	+3.3/20, +5/20, +12/8, +12/14.5, -12/0.8, +5VSB/2	90-264 @ 47-63 switching	3-prong AC receptacle (P/N 38050, pg 14)	UL/CUL/TUV/CE	5.1 x 4.9 x 2.5	2.7	59.95	53.95	49.95
2179497	FSP	IP-S350AQ2-0	350	+3.3/20, +5/16, +12/10, +12/13 -12/0.3, +5VSB	115/230 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 14)	UL/TUV/CE	6.0 x 5.5 x 3.5 (1U)	2.7	29.95	26.95	24.95
2172754	Top Micro	P6350H1FRS2*	350	+3.3/20, +5/20, +12/16, +12/12, -12/1, +5VSB	115/230 @ 50-60 switching	3-prong AC receptacle (P/N 38050, pg 14)	UL/CUL/TUV/CE	8.0 x 4.0 x 1.5 (1U)	3.0	39.95	34.95	29.95

*See photo above † Comes with SATA ready connector †† 80 Plus energy efficient

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Switchcraft® Male & Female Power Jacks

*Web Code: BAM

Part No.	Mfr.	Product No.	Description Pin Dia. x OD	Dimensions H x W x D (mm)	Type/ Mount	Circuit/ Terminal	1	10	100
101194	ValuePro	PP024R	1.3 x 3.5mm male	6.0 x 6.0 x 9.0	1/D	1/B	$.59	$.55	$.45
2168114	Adam Tech	ADC-002A-1R	2.0 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.39	.35	.29
2188625	ValuePro	PJ2155	2.1 x 5.5mm male	10.9 x 9.0 x 14.0	2/D	1/A	.35	.29	.25
101178	ValuePro	PP014	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.39	.35	.29
101179	ValuePro	PP014R	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.45	.39	.35
137673	ValuePro	PP013R	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	3/D	4/A	.45	.39	.35
151590	ValuePro	DPJ-02IAR	2.1 x 5.5mm male	18.0 x 12.6 Dia.	4/C†	1/A	.89	.79	.69
151555	ValuePro	DPJ-026R[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	5/C	1/A	1.75	1.59	1.39
281851	Switchcraft	722AR[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	7/C	1/A	4.95	4.49	3.95
159611	ValuePro	PJ1014AR	2.1 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.75	1.59	1.39
2151136	ValuePro	HD2388CR	2.1 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
2144690	ValuePro	L5225	2.1 x 5.5mm male	11.0 x 9.1 x 14.7	13/D	1/A	.35	.29	.19
207714	ValuePro	HEC0470	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/B	.55	.49	.39
101187	ValuePro	PP014AR	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/A	.55	.49	.45
151563	ValuePro	DPJ-026AR[2]	2.5 x 5.5mm male	15.1 x 8.0 Dia.	5/E	1/A	1.49	1.35	1.19
159506	ValuePro	PJ1015AR	2.5 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.49	1.35	1.19
202358	ValuePro	HD2388	2.5 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
281842	Switchcraft	712AR[2]	2.5 x 5.5mm male	15.8 x 7.5 Dia.	7/C	1/A	4.95	4.49	3.95
297553	Switchcraft	PC712AR[2]	2.5 x 5.5mm male	23.3 x 11.0 Dia.	9/D	1/A	3.49	2.49	1.95
2144745	ValuePro	J25M	2.5 x 5.5mm male	11.1 x 8.9 x 13.4	14/C	1/A	.29	.25	.19
2168122	Adam Tech	ADC-002A-2R	2.5 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.59	.55	.49
101143	ValuePro	PJ0352R[1]	3.5 mm female	10.0 x 10.0 x 18.5	10/E	2/A	.49	.45	.39
109496	ValuePro	PJ035PMR[1]	3.5 mm female	10.5 x 9.0 x 20.0	11/C	2/A	.49	.45	.39
165730	ValuePro	PJ0354RR[1]	3.5 mm female	15.5 x 5.9 Dia.	12/C	3/A	.79	.69	.59
2183218	ValuePro	M6HDWR	Additional Panel Mounting Hardware indicated with 1 (see Web)				.69	.59	.49
281852	Switchcraft	5/16-32HDWR	Additional Panel Mounting Hardware indicated with 2 (see Web)				.69	.59	.49

† Center offset *Plastic

Terminals	Code
Solder eyelet	A
PC board	B

Mounting	Code
Panel	C
PCB	D
Panel & PCB	E
Cable	F



Switchcraft® AC/DC Power Plugs & Adapters

*Web Code: MFP

Part No.	Mfr.	Product No.	Fig.	Description (Barrel) Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
71192	ValuePro	PP137R	1	F plug, 1.3 x 3.5 x 9.5	4.1 x 12 (black)	$.79	$.69	$.65
1537395	ValuePro	PL-005R	2	F plug, 1.3 x 3.5 x 9.5 (right angle)	2.8 x 11 (black)	.89	.79	.69
191484	ValuePro	PP049W	1	F plug, 2.1 x 5.5 x 9.0	4.6 x 12.5 (white)	.89	.79	.69
2004890	ValuePro	PP049S	1	F plug, 2.1 x 5.5 x 9.5	4.5 x 12.5 (black)	.89	.79	.69
28760	ValuePro	PP049R	1	F plug, 2.1 x 5.5 x 9.5 (P205)	4.1 x 12 (black)	.89	.79	.69
2201990	ValuePro	CS1021-HP-12	3	F plug, 2.1 x 5.5 x 12	8.3 x 22 (black)	1.49	1.25	1.09
2179358	ValuePro	27-1136AR	7	F plug, 2.1 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	3.75	3.49	2.95
2145123	ValuePro	CS1021-A-12MMR	1	F plug, 2.1 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
138587	ValuePro	PJ021	2	F plug, 2.1 x 5.5 x 12 (right angle)	2.8 x 11 (black)	.89	.79	.65
147329	ValuePro	PP049LR	1	F plug, 2.1 x 5.5 x 14 (P205L)	4.3 x 12 (black)	.89	.79	.65
190538	ValuePro	PP109SR	1	F plug, 2.5 x 5.5 x 9.5	4.7 x 13 (black)	.89	.79	.65
281877	Switchcraft	760R	3	F plug, 2.5 x 5.5 x 9.5	5.5 x 25 (black)	3.95	3.59	3.25
28768	ValuePro	PP109R	1	F plug, 2.5 x 5.5 x 9.5 (P206)	4.7 x 13 (black)	.89	.79	.65
2179366	ValuePro	27-1136BR	7	F plug, 2.5 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	3.75	3.49	2.95
2145115	ValuePro	CS1021-B-12MMR	1	F plug, 2.5 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
147336	ValuePro	PP109LR	1	F plug, 2.5 x 5.5 x 14 (P206L)	4.2 x 12 (black)	.89	.79	.69
168242	ValuePro	PP109NR	3	F plug, 2.5 x 5.5 x 14	3.9 x 22 (black)	.89	.79	.69
2099163	ValuePro	PL-008R	2	F plug, 2.5 x 5.5 x 9.5 (right angle)	2.8 x 11 (black)	.95	.85	.75
101135	ValuePro	JR-1020	4	M plug, — x 2.5 x 11 (P201)	4.3 x 13 (black)	.69	.59	.49
231176	ValuePro	AP-340R	4	M plug, — x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	.79	.69	.55
231167	ValuePro	AP-343	5	M plug, — x 3.5 x 14 (stereo)	4.4 x 13 (metal)	1.49	1.25	.99
231160	ValuePro	PJ1035R	5	M plug, — x 3.5 x 14 (mono)	4.8 x 13.5 (metal)	1.49	1.25	.99
101152	ValuePro	PJ1035R	4	M plug, — x 3.5 x 14.5 (P202)	4.0 x 13 (black)	.69	.59	.49
2200954	ValuePro	JR1037	8	M plug, — x 3.5 x 14.5 (stereo)	4.5 x 12 (black)	1.95	1.75	1.49
2112989	ValuePro	JP1828CR	6	Adapter, 2.1mm M to 1.3mm F (1.3"L)	—	1.59	1.45	1.09
1953591	ValuePro	DCJ2.1-DCP2.5R	6	Adapter, 2.1mm M to 2.5mm F (1.4"L)	—	1.59	1.45	1.09
2113711	ValuePro	JR1827R	6	Adapter, 2.5mm M to 1.7mm F (1.7"L)	—	1.19	1.09	.95
1953604	ValuePro	DCJ2.5-DCP2.1R	6	Adapter, 2.5mm M to 2.1mm F (1.4"L)	—	1.59	1.45	1.09

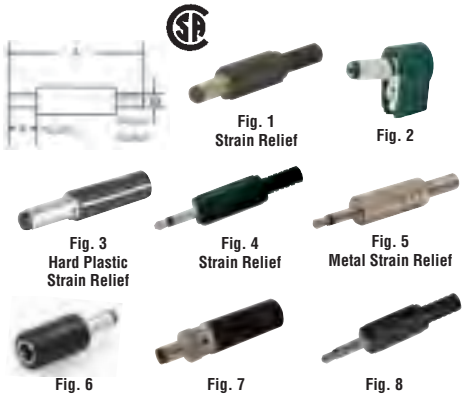

DC Extension Power Cables

Part No.	Mfr.	Cross Ref. No.	Description (Barrel) ID x OD x L (mm)	AWG	Color	1	10	100
2099147	ValuePro	DCEXTCORD2.1- 3FTR	2.1F x 2.1M x 3' cable	18	Black	$1.95	$1.75	$1.59
2099121	ValuePro	DCEXTCORD2.1- 6FTR	2.1F x 2.1M x 6' cable	18	Black	2.49	2.25	1.95
2099155	ValuePro	DCEXTCORD2.5- 3FTR	2.5F x 2.5M x 3' cable	18	Black	1.95	1.75	1.59
2099139	ValuePro	DCEXTCORD2.5- 6FTR	2.5F x 2.5M x 6' cable	18	Black	2.49	2.25	1.95

Automobile Fused Power Plugs with Cords

- Accepts .25" x 1.25" fuse

115002: Screw assembly with strain relief (no cord)

124760: 3' cord w/ pigtail

Part No.	Fuse	1	10	100
115002	5A/250VACR	$2.25	$1.99	$1.79
124760	3A/250VACR	2.49	2.25	1.99

Power Cord Adapters

NEW MARKED IN PINK

2188545: Receptacle IEC C14 to plug Nema 5-15R

2188553: Receptacle CEE 7/7 to plug Nema 5-15R

Part No.	Cross Ref. No.	1	10	100
2188545	YL-3215R	$3.95	$3.59	$2.95
2188553	YL-2215R	3.95	3.59	2.95

R RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

DC Cords with Pigtail – 6' length

• 24 AWG • Color: black

★Web Code: MFP

Part No.	Cross Ref. No.	Fig.	Description (Barrel) ID x OD x L (mm)	1	10	100
2114706	6FT#245.5X1.7	1	Plug, 1.7 x 5.5 x 12	$1.15	$.99	$.89
2096763	DCCORD2.1	1	Plug, 2.1 x 5.5 x 12	1.59	1.39	1.15
2096771	DCCORD2.5	1	Plug, 2.5 x 5.5 x 12	1.59	1.39	1.15
2114600	6FT#245.5X2.1	2	Jack, 2.1 x 5.5 x 12	1.59	1.39	1.15
2114597	6FT#245.5X2.5	2	Jack, 2.5 x 5.5 x 12	1.59	1.39	1.15

Fig. 1

Fig. 2

We specialize in wall adapters. Call for additional OEM pricing.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each or $4.00 each molded. A 100 pc. minimum order applies.

International Step-Up & Step-Down Transformers

★Web Code: RAL

Part No.	Cross Ref. No.	Fig.	Type	Volt Step	Primary Voltage	Secondary Voltage	Watts (VA)	Dimensions H"	W"	D"	Wt. (lbs.)	Pricing 1	5	25
221331	GIS-500	A	Isolation	—	120VAC	120VAC	500	4.69	3.75	6.00	16.0	$89.95	$79.95	$69.95
85008	GPC-1003R	A	Auto	Up	120VAC	220VAC	300	3.50	3.05	3.95	4.8	45.95	39.95	34.95
221217	P8689	A	Auto	Up	120VAC	230VAC	1000	4.63	3.75	6.13	17.0	89.95	79.95	69.95
85016	GPC1003	B	Auto	Down	220VAC	120VAC	300	3.50	3.05	3.95	4.8	49.95	44.95	39.95
111851	GPC1005	B	Auto	Down	220VAC	120VAC	500	3.99	3.60	4.84	8.5	69.95	62.95	56.95

Fig. A Plug

Fig. B Plug



Output Receptacle

Quick-Connect Power Transformers

• Input voltage: 120/230VAC, 50-60Hz • Terminals: quick-connect, solder

★Web Code: BAN

Part No.	Product No.	Triad Cross*	Input Voltage	Output Voltage	Watts (VA)	Size of Connect	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	5	25
101864	XFR2424Q	FD724	120/230VAC	24VCT @ 2.4A	57.6	0.141"	2.10	2.70	2.29	1.7	$10.95	$9.49	$8.95
104417	XFR3615Q	FD736	120/230VAC	36VCT @ 1.5A	54.0	0.141"	2.30	2.70	2.30	1.8	19.95	18.49	16.95

*Triad cross is for reference only



104387



Power Transformers (7.6 Watts to 288 Watts)

★Web Code: PTL

Power transformers have both single and dual-voltage inputs and center-tapped outputs. This makes them the perfect choice for power supply design or for use in transformer, rectifier and filter circuits.

• Primary: 120VAC or 120/230VAC, 50-60Hz

29226




120/230VAC 50-60Hz Fig. 1


120VAC 50-60Hz Fig. 2


120VAC 50-60Hz Fig. 3


120VAC 50-60Hz Fig. 4

Part No.	Product No.	Triad Cross#	Primary Color Code			Watts (VA)	Secondary Voltage	Secondary Color Code			Lead Type	Fig.	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
105524	XR082-91-R	—	Black	White*	Red	9.0	4.5VCT @ 1A	Blue	Black*	Blue	Wire	1	1.82	2.43	1.67	0.7	$11.95	$10.95	$9.95
102163	XFR6102	F314X	Black	Yellow*	Red	7.6	6.3VCT @ 1.2A	White	Black*	White	Wire	1	1.84	2.40	1.67	0.8	10.95	9.95	8.95
221400	P-8657	F218X	Black	—	Black	24.0	12VAC @ 2A	White	—	White	Wire	2	1.89	2.75	1.99	1.3	11.95	10.95	9.95
221356	P-8658	F219X	Black	—	Black	48.0	12VAC @ 4A	White	—	White	Wire	2	2.25	4.00	2.63	2.3	12.95	11.95	10.95
2188502	53260	—	Red	—	Green	36.0	12VCT @ 3A	Purple	Multi	Grey	Wire	4	2.36	2.34	1.94	1.3	9.95	8.95	7.95
104387	XFR1225Q	FD612	—	—	—	31.5	12.6VCT @ 2.5A	—	—	—	—	1	1.75	2.33	2.00	1.3	12.95	11.95	10.95
29226	XFR122	F44X	Yellow	—	Yellow	25.2	12.6VCT @ 2A	Blue	Red*	Black	Wire	3	2.41	2.79	1.99	1.5	13.95	12.49	10.95
102155	XFR1220	F344X	Black	Yellow*	Red	25.2	12.6VCT @ 2A	White	Black*	White	Wire	1	2.35	2.32	1.97	1.5	13.95	12.49	10.95
149771	XFR1240	F3181U	Black	Red*	Yellow	50.4	12.6VCT @ 4A	White	Black*	White	Wire	1	2.45	3.20	2.25	2.2	14.95	13.49	10.95
102121	XFR124	F181U	Black	—	Black	50.4	12.6VCT @ 4A	White	Black*	White	Wire	3	2.45	3.21	2.26	2.7	14.95	13.49	10.95
105532	XFR1810	—	Blue	Red*	Black	18.0	18VCT @ 1A	Yellow	Black*	Yellow	Wire	1	2.20	2.81	1.99	1.2	11.95	10.95	9.95
149957	XFR1820	—	Black	Red*	Yellow	36.0	18VCT @ 2A	White	Black*	White	Wire	1	2.25	3.15	2.71	1.8	12.95	11.95	10.95
112513	XFR242N	F229X	Black	—	Black	48.0	24VAC @ 2A	White	—	White	Wire	2	2.33	3.16	2.28	1.8	13.95	12.49	10.95
221382	P8396	—	Black	—	Black	9.6	24VCT @ 0.4A	White	Black*	White	Wire	3	1.63	2.80	1.97	0.6	9.95	8.95	7.95
102112	XFR2410	F346X	Black	Yellow*	Red	24.0	24VCT @ 1A	White	Black*	White	Wire	1	2.41	2.80	1.99	1.5	10.95	9.95	7.95
221373	P-8662	F192X	Black	—	Black	48.0	24VCT @ 2A	White	Black*	White	Wire	3	2.44	3.60	2.23	2.3	13.95	12.49	10.95
221365	P-8663 †	F193U	—	—	—	96.0	24VCT @ 4A	—	—	—	Lug	3	2.81	2.94	4.00	4.0	25.95	23.95	21.49
99654	XFR242	—	Red	—	Red	49.2	24.6VCT @ 2A	Blue	Yellow*	Blue	Wire	3	2.44	3.22	2.30	2.5	12.95	11.49	9.95
102104	XFR2520	F341X	Black	White*	Red	50.4	25.2VCT @ 2A	Orange	Black*	Orange	Wire	1	2.45	3.22	2.26	2.8	12.95	11.49	9.95
149797	XFR2820	F3185U	Black	Red*	Yellow	56.0	28VCT @ 2A	White	Black*	White	Wire	1	2.45	3.22	2.26	2.3	13.95	12.95	10.95

* Center tap # Triad cross is for reference only † Solder terminal

★Audio Transformers — Enter Web Code SAJ

★Variable Transformers — Enter Web Code MAR

★DC Power Plugs & Adapters — Enter Web Code MFP

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Split-Bobbin Power Transformers (2.5 to 20VA)

JAMECO ValuePro

Non-concentrically wound w/ primaries & secondaries side-by-side providing low capacitive coupling.

- Primary: 120/230VAC, 50-60Hz
- PC terminal pin spacing for accurate placement



★Web Code: LBK

Part No.	Cross Ref. No.	Triad Cross*	Input Voltage	Watts (VA)	Individual Output	Parallel Output	Series Output	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
221292	DSW-312	FS12200	120/230	2.5	6.3V @ .20A	6.3V @ .40A	12.6VCT @ .20A	1.38	1.13	1.19	0.3	$6.95	$6.25	$5.59
102593	SPW-2304R	FS24500	120/230	12	12V @ .50A	12V @ 1.0A	24VCT @ .50A	2.00	2.50	1.06	0.7	7.95	6.95	6.25
2183402	SPW-1304	—	120/230	20	12V @ .85A	12V @ 1.66A	24VCT @ .83A	1.88	2.25	1.57	1.0	7.95	6.95	5.95

* Triad cross is for reference only

PC Mount Modem Coupling Transformer

JAMECO ValuePro

- Core type: EI-14
- Insulation resistance: 100MΩ
- ±20% impedance matching and DC resistance matching
- Hipot tested: 1000VAC • Vacuum wax impregnated

Part No.	Cross Ref. No.	Impedance (Ω) Primary	Secondary	Resistance (Ω) Primary	Secondary	Pricing 1	10	100
125357	XFR6006A14R	600CT	600CT	65	55	$4.49	$3.95	$3.75

PC Mount Audio Transformer

TRIAD

- Impedance matching: 10% over frequency range
- 6-pin PC mount • Output: 100mW
- Impedance (Ω): 600CT/600CT
- Primary DC Unbalance: 15mA



Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	10	100
630459	TY-145P	13/16" x 9/32" x 5/8"	$4.49	$3.95	$3.49

Low Frequency Current Sensing Transformer

TRIAD

May be used to monitor current 0.1-30A @ frequencies 50-400Hz.

- Turns ratio: 1:500 • Typical output: 110mV/amp
- Hi-pot: 500V • Burden resistor: 60Ω

Part No.	Mfr. Part No.	Sen DCR	Primary DCR	1	10	100
627591	CSE187L	21Ω max.	250μΩ max.	$5.49	$4.95	$3.59

Current Sensing Transformer

JAMECO ValuePro

- Frequency range: 10-50 kHz
- Inductance: 5mH • Turns: 60
- Sensitivity current (I_{in}): 1A • Sensitivity voltage (V_{out}): 1V
- Terminating resistor: 50Ω • Max. current: 300mA

Part No.	Cross Ref. No.	Dimensions (W x D x H)	1	10	100
164718	MTC30101	0.7" x 0.46" x 0.8"	$2.95	$2.59	$2.25

5-Position Low Voltage Distribution Block

- Dual (neg./pos.) input terminals on each end for parallel "add-on" capability
- Negative and positive bus bar for efficient power distribution
- Up to 20 amps per fuse / 75 amps per block
- Uses standard ATC/ATO automotive fuses (not included)



Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	5	25
2179631	DB-5R	3.5" x 2.5" x 1.5"	$35.95	$33.95	$31.95

320VA Variable AC Transformer

JAMECO ValuePro

- Input voltage: 110VAC @ 50-60Hz • Max. current: 2.5A
- Matching input/output terminals: P/N 103668 & 109112 (disconnect .25" solderless terminals), see Web
- Panel mount • One-year warranty • Shaft length: 0.5"

Includes: 3 disconnect .25" solderless terminals

Part No.	Cross Ref. No.	Weight	Size (Dia. x H)	1	5	25
149324	PSV-203-R	2.5 lbs.	2.8" x 2.1"	$64.95	$59.95	$54.95

500 to 2000VA Variable Transformers

JAMECO ValuePro

- Input: 110VAC or 220VAC
- Power: 500, 1000 or 2000VA
- Output: 0-240VAC
- Banana/screw input terminals
- Universal US/European output plugs
- Lighted on/off power switch

121276

Part No.	Fuse	Size (W" x D" x H")	Wt. (lbs.)
121276	3A/250V (P/N 69439)	5.3 x 7.3 x 7.0	10.4
129008	5A/250V	9.4 x 6.5 x 7.7	14.8
152582	10A/250V (P/N 69462)	9.0 x 7.0 x 7.7	19.8

Part No.	Description	1	5
121276	500VA transformerR	$139.95	$129.95
129008	1000VA transformerR	169.95	154.95
152582	2000VA transformerR	224.95	199.95

300VA Isolation Transformer 120VAC to 120VAC

JAMECO ValuePro

- Input connector: 5.5' cord with 2-prong plug
- Output volt.: 120VAC @ 2.5A (isolated)
- Input voltage: 120VAC @ 60Hz
- Size: 3.2"W x 4.6"D x 4.2"H • Weight: 7.0 lbs.

Part No.	Cross Ref. No.	1	5	25
181315	ITR300	$49.95	$44.95	$39.95

EMI Suppression Cores with Case

JAMECO ValuePro

Laird

218174

1952901

Reduce Electromagnetic Interference (EMI) with a snap of these suppression cores around a power cord or data cord. Easy to install and an affordable way to reduce EMI without redesigning your product.

- Impedance at 100MHz between 75-225Ω min.
- Color: black

Round

Part No.	InDia.	OutDia.	Length	1	10	100
218174R	.20"	.64"	1.15"	$1.25	$.99	$.75
217842R	.34"	.78"	1.40"	1.49	1.25	.99

Square

Part No.	InDia.	Width	Height	Length	1	10	100
2094987R	.20"	.55"	.59"	1.40"	$.89	$.75	$.59
1952901	.25"	.70"	.77"	1.30"	.69	.59	.49

International Step-Up/ Step-Down Autotransformer

AEO

- Input volt.: 110/200/220/240V
- Output voltage: 110/220V
- Power: 80 watts continuous/ 100 watts intermittent
- Two free spare fuses • On/off switch
- European to US adapter on power cable
- Universal European/US output receptacles
- Dimension: 5.2"L x 3.7"W x 3.5"H • Fuse protected

Part No.	Mfr. Part No.	1	5	25
2082599	VC-100	$13.95	$12.95	$11.95

In-Car USB Charger/Adapter

JAMECO ValuePro

- Input voltage: 12VDC to 24VDC
- Output voltage: 5VDC @ 600mA
- Output connector: USB type A
- LED indicator for power
- Overall length: 2"

Part No.	Cross Ref. No.	1	10	100
2158320	CC001-BLKR	$3.95	$3.59	$2.95

★Audio Transformers — Enter Web Code SAJ

★Variable Transformers — Enter Web Code MAR

6kV-7.4kV High Voltage Power Supply

MADE IN USA



- Input voltage range: 113VAC to 132VAC
- Input lead wires: 22 AWG UL1015, 7.5"L; AC hot (black), AC COM (white), HV RTN (green) • Output voltage: 6.0kV to 7.4kV
- Output lead wires: 22 AWG UL3239, 10" (pink)
- UL94V-0 rated encapsulant filled epoxy • Size: 3.0"L x 1.2"W x 1.0"H

Part No.	Mfr. Part No.	Description	1	10	50	100
2100136	CS2080A3	High voltage power supply	$5.95	$4.95	$3.95	$2.95

R RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320)

Fig. 1 (Faston)

Fig. 2



Fig. 3 (Right Angle)

Fig. 4 (Faston)

Fig. 5

Fig. 6

Fig. 7

Fig. 8



Fig. 9 (6-32 Panel Mount)

Fig. 10



Fig. 11

Fig. 12

Fig. 13

Fig. 14



Fig. 15

Fig. 16

Fig. 17



Fig. 18



Fig. 19



Fig. 20

- Rated voltage: 115/250VAC • Operating frequency: 50/60Hz
- Hipot rating (one minute) line to ground: 2250VDC; line to line: 1450VDC

EMI Power Entry Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.20mA @ 250VAC 50Hz: 0.40mA

EMI Line Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.25mA; 1.0mA (10000pF) @ 250VAC 50Hz: 0.45mA; 2.0mA (10000pF)

NEW MARKED IN PINK

★Web Code: ACR

Fig. 21

Fig. 22

Fig. 23

Fig. 24

Part No.	Mfr.	Product No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.) A	B	C	D	Pricing 1	10	100
1951511	Delta	01GEEG3E (1ED1)†	Power entry filter, straight (screw flanged)	1	1	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	$2.49	$2.25	$1.95
1951529	Delta	01DEEG3V	Power entry filter, rt. angle (screw flanged)	3	1	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	.79	.69	.59
1172613	Tyco	1EGG1-2ℛ	Pwr entry filter, straight, fused (screw flanged)	4	1	2250	Faston	0.25"	UL/CSA/VDE	1.62	1.29	1.44	1.27	.79	.69	.59
2189599	Adam Tech	PLF-1DZ2KRℛ	Pwr entry filter, w/ fuse & switch (screw flanged)	2	1	250	Faston	0.25"	UL/CSA/DVE	1.97	2.56	1.58	1.58	9.95	8.95	7.95
2133683	Schaffner	FN291E-2.5-05	Power entry filter, straight (screw flanged)	6	2.5	1700	Faston	0.25"	—	1.26	2.80	1.10	2.35	2.49	1.95	1.59
107326	Delta	03DEEG3B-R	Power entry filter, straight (screw flanged)	1	3	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	4.95	4.49	3.95
2178523	Schurter	5110.0343.1	Power entry filter, straight (snap-in)	7	3	2250	Faston	0.25"	UL/CUL	1.42	0.91	1.19	0.80	2.95	2.59	1.95
2114116	Adam Tech	PLF-3PCℛ	Line filter, metal case (PC mount)	8	3	250	Solder	0.039"	UL/CSA/VDE	0.984	0.984	0.787	—	5.95	5.39	4.79
2189581	Adam Tech	PLF-3DZ2KRℛ	Pwr entry filter, w/ fuse & switch (screw flanged)	2	3	250	Faston	0.25"	UL/CSA/DVE	1.97	2.56	1.58	1.58	9.95	8.95	7.95
1954720	Delta	04BEEG3S	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.26	1.19	1.26	1.40	1.29	1.09	.79
1811391	Delta	06A2Dℛ	Power entry module (snap-in)	21	4	2250	Faston	0.25"	UL/CSA/VDE	2.65	2.50	1.06	1.11	6.95	6.25	5.59
1951570	Delta	05DRDG3S (5ER7)†	Power entry filter, 6-32 threaded panel mount	9	5	2250	Faston	0.25"	UL/CSA/VDE	3.15	1.97	1.28	1.58	1.95	1.79	1.59
2114124	Adam Tech	PLF-6DZ2KRℛ	Pwr entry filter, strght, fuse & sw. (scrw flngd)	10	6	250	Faston	0.25"	UL/CSA/VDE	1.968	2.559	2.394	1.154	9.95	8.95	7.95
1951588	Delta	06DEEG3V	Power entry filter, right angle (screw flanged)	3	6	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	1.79	1.45	1.25
2197871	Delta	06BENG3Gℛ	Power entry filter, male (snap-in)	23	6	2250	Faston	0.32"	UL/CSA/VDE	0.30	1.90	1.10	1.70	8.95	7.95	6.95
1172672	Corcom	IVB3ℛ	Line filter (flange mount)	5	10	2250	1.5" Wire	Wire	UL/CSA/VDE	0.96	1.82	0.66	2.53	7.95	6.95	5.95
1951596	Delta	10GEEG3C†	Power entry filter, straight (screw flanged)	1	10	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	2.95	2.59	2.25
2178507	ValuePro	6100-4115	AC power inlet, male (snap-in)	15	10	250	Solder	0.14"	UL/CSA/VDE	1.19	0.91	1.06	0.77	.49	.45	.39
117445	ValuePro	0717ℛ#	AC power inlet, male w/ fuse chamber (snap-in)	17	10	250	Faston	0.187"	UL/CSA/VDE	1.18	1.30	1.05	1.20	1.95	1.79	1.59
265528	ValuePro	WS-044ℛ#	AC power inlet, male w/ fuse chamber (screw)	18	10	250	Faston	0.187"	UL/CSA/VDE	1.40	1.28	1.06	1.21	1.75	1.49	1.25
2197880	Delta	10DRCS5ℛ	Power entry filter (flange mount)	24	10	2250	Threadpost	0.164"	UL/CSA/VDE	3.87	1.52	2.94	1.21	13.95	12.49	11.95
2189521	Adam Tech	IEC-GS-1-150ℛ	Pwr entry filter, w/ fuse & switch (snap-in)	22	15	250	Faston	0.187"	UL/CSA/DVE	1.20	1.97	1.06	1.83	2.95	2.75	2.49
1951617	Delta	15DEEG3HA(D)	Power entry filter, straight (screw flanged)	1	15	2250	Faston	0.25"	UL/CSA/VDE	2.42	1.19	0.87	1.58	3.95	3.59	3.19
2189564	Adam Tech	NEMA-5-1-Aℛ	AC pwr inlet, NEMA fem, angled GND pin (snap-in)	11	15	125	Faston	0.25"	UL/CSA/DVE	1.06	1.06	0.70	0.85	.99	.85	.69
2189572	Adam Tech	NEMA-5-1-Bℛ	AC pwr inlet, NEMA fem, straight GND pin (snap-in)	11	15	125	Faston	0.25"	UL/CSA/DVE	1.06	1.06	0.70	0.85	.99	.85	.69
2114095	Adam Tech	NEMA-5-2ℛ *	AC power outlet, NEMA receptacles (snap-in)	11	15	125	Fork	0.25"	UL/CSA/VDE	1.063	1.063	0.70	0.866	.99	.85	.69
147901	ValuePro	701Rℛ	AC power inlet, male (screw flanged)	12	15	250	Faston	0.187"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
16652	ValuePro	JR101ℛ	AC power inlet, male (screw flanged)	12	15	250	Faston	0.25"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
2133712	Schurter	VSP1.8101.1	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.05"	UL/CSA/VDE	1.96	1.09	1.09	0.78	.39	.35	.29
2114010	Adam Tech	IEC-A-4ℛ	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.071"	UL/CSA/VDE	1.97	0.89	1.06	0.76	.39	.29	.19
2178494	ValuePro	EAC-324	AC power inlet, male, straight (screw flanged)	14	15	250	Solder	0.16"	UL/CSA/VDE	1.96	0.89	1.09	1.09	.49	.45	.39
2178515	ValuePro	EAC-409	AC power inlet, male (snap-in)	15	15	250	Solder	0.16"	UL/CSA/VDE	1.22	0.94	1.06	0.78	.79	.69	.59
147109	ValuePro	42R02	AC power inlet, male (snap-in)	16	15	250	Faston	0.25"	UL/CSA/VDE	1.23	0.95	1.04	0.77	1.09	.99	.79
2095525	ValuePro	IEC-GS-1-100#	AC pwr inlet, male w/ sw. & fuse folder (snap-in)	15	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	0.77	1.83	2.95	2.75	2.49
1954640	ValuePro	K2415	AC power inlet, female (snap-in)	19	15	250	Faston	0.187"	UL/CSA/VDE	1.38	0.98	1.26	1.10	.49	.39	.29
1954658	ValuePro	K2414	AC power inlet, female (screw flanged)	20	15	250	Faston	0.187"	UL/CSA/VDE	1.97	1.14	1.26	0.95	1.75	1.49	1.25
2157546	Adam Tech	IEC-GS-1-200ℛ	AC pwr fused inlet, male w/ switch (snap-in)	2	15	250	Faston	0.187"	UL/CSA/VDE	1.07	1.97	1.06	1.83	2.49	2.25	1.95

† High Performance; Increased filtering; Added bleeded resistor; More safety agencies * For 14-16 AWG wire # Includes spare fuse holder – fuse type 5mm x 20mm (250V)

International Power Cords

★Web Code: XAQ

- 3-conductor detachable power cords
- Excellent resistance to jacket abrasion
- Cord color: black; except P/N 172195: grey
- BSI: British Standard Institution
- Cord type: H05VVF
- Voltage rating: 300V

Part No.	Cross Ref. No.	Country	Agency Approvals	Plug Fig.	Cord Length	Conductors	Pricing 1	10	100
117911	2171H576ℛ	Europe	All	1/A	6 ft.	3/0.75mm	$4.95	$4.49	$3.95
174633	21071H5182ℛ	UK/Ireland	BSI	2/A	8 ft.	3/1.0mm	6.95	6.25	5.59
172195	8120-6979ℛ	Italy	All	3	6 ft.	3/1.0mm	.99	.89	.79

Fig. 1 (Straight)

Fig. A

Fig. 2 (Right Angle, Fused)

Fig. 3

European Agency Approvals

Germany	VDE		France	LCIE	
Austria	OVE		Netherlands	KEMA	
Belgium	CEBEC		Norway	NEMKO	
Denmark	DEMKO		Sweden	SEMKO	
Finland	FIMKO		Switzerland	SEV	

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Power Cords

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Line Cord w/ Pigtail (Fig. 1) w/ Strain Relief (Fig. 1A)

Laptop Power Cord (Fig. 2)



AC Plug Fan Power Cord (Fig. 3)

Power Cord w/ Pigtail (Fig. 4)

Detachable Power Cord (Fig. 5)

(Fig. 6A) (Fig. 6B)
Computer Power Supply Extension Cord (Fig. 6)

Straight or Right Angle w/ Pigtail (Fig. 7)



Right Angle Detachable Power Cord (Fig. 8)

Hospital Grade Power Cord (Fig. 9)

Computer Monitor Power Adapter Cord (Fig. 10)

Detachable Power Strip Saver (Fig. 11)

Example (Fig. 11)

Power Strip Saver II (Fig. 12) Example (Fig. 12)



4' Overall Length "Y" Twin End (Fig. 13)

Mickey Mouse™ Style Power Cord (Fig. 14)

Plug Detail – Industry Standard Designations



JAMECO ValuePro

2 & 3-Conductor Fan, Pigtail, Detachable & Hospital Grade Power Cords

- Molded connectors
- Excellent resistance to jacket abrasion
- Voltage rating: 300 volts
- Temperature: -20°C to +60°C

*Web Code: UBF

AWG	Volts	Amps	VA
18	125	10	1250
16	125	12	1500
14	125	15	1875

2-Conductor Line Cords with Pigtail

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	100
2120188	444010-4	JVP	.15	1A	4'	Black	18/2	SPT-2	$1.95	$1.75	$1.49	$1.25
124434	ST008℞	JVP	.16	1	6'	Black	18/2	SPT-2	2.49	2.25	1.95	1.75
42042	SY-001-R℞	JVP	.18	1A	6'	Black	18/2	SPT-2	2.95	2.75	2.49	2.25

2-Conductor "8" Style Power Cords for Laptops and Power Supplies

2151195	123855-1℞	JVP	.15	2	3'	Black	18/2	SPT-2	$1.25	$1.09	$.95	$.85
355944	VW-1G	JVP	.30	2	6'	Gray	18/2	SPT-2	1.95	1.75	1.49	1.25
189587	VW-1℞	JVP	.30	2	6'	Black	18/2	SPT-2	2.95	2.69	2.39	2.19

2-Conductor AC Plug Fan Power Cords

1952572	FACS℞	JVP	.40	3A	6'	Black	18/2	SPT-2	$3.95	$3.59	$3.19	$2.49
1952581	FAC45℞	JVP	.40	3B	6'	Black	18/2	SPT-2	4.95	4.59	3.95	3.49

3-Conductor Power Cords with Pigtail (Unshielded) 290 Plug

38009	17237℞	JVP	.31	4	6'	Gray	18/3	SVT	$3.79	$3.39	$2.95	$2.79
2158258	17236SR℞#	JVP	.35	4	6'	Black	18/3	SVT	3.95	3.59	3.25	2.75
37997	17236℞	JVP	.30	4	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
173810	17405℞	JVP	.14	4	6'	Gray	18/3	SJT	4.95	4.49	3.95	3.59
159410	17405B℞	JVP	.37	4	6'	Black	18/3	SJT	4.95	4.49	3.95	3.59
38025	17238℞	JVP	.42	4	8'	Black	18/3	SVT	5.95	5.49	4.95	4.49
102007	17535B℞†	JVP	.49	4	10'	Black	18/3	SVT	5.95	5.49	4.95	4.49
196286	LL40378℞	JVP	.80	4	10'	Black	16/3	SJT	7.95	6.95	5.95	4.95
166925	17516℞	JVP	.41	4	6'7"	Black	14/3	SJT	9.95	8.95	7.95	6.95
100272	17629B℞	JVP	.88	4	9'	Black	14/3	SJT	9.95	8.95	7.95	6.95

3-Conductor Detachable Power Cords (Unshielded) 290B/386A Plugs

2081801	17002A℞	JVP	.36	5	1'	Black	18/3	SVT	$2.95	$2.65	$2.39	$1.95
2172834	LL11094B	JVP	.16	5	1.5'	Black	18/3	SVT	2.49	1.95	1.75	1.59
2082425	17000A	JVP	.35	5	3'	Black	18/3	SVT	3.25	2.95	2.59	2.29
38041	17249℞	JVP	.37	5	6'	Beige	18/3	SVT	3.49	2.95	2.49	1.95
2202280	17250RFI℞§	JVP	.36	5	6'	Black	18/3	SVT	3.95	3.59	3.29	2.95
38050	17250℞	JVP	.36	5	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
132118	17500℞	JVP	.44	5	6'	Black	18/3	SJT	4.95	4.49	3.95	3.25
1585637	171096	JVP	.60	5	8'	Black	18/3	SVT	4.95	4.49	3.95	3.59
102024	17501V℞	JVP	.55	5	10'	Black	18/3	SVT	5.95	5.69	5.39	4.95
163361	6952299	JVP	.75	5	14'	Black	18/3	SJT	7.95	6.95	6.25	5.59
2145051	177323	JVP	.70	5	15'	Black	18/3	SVT	5.95	4.95	4.49	3.95
2188650	LL81924℞	JVP	.72	5	8'	Gray	18/3	SJT	4.95	3.95	3.49	2.95
2126053	LL76932§	JVP	.52	5	6'	Black	16/3	SJT	3.95	2.95	2.49	1.95
159361	17602	JVP	.52	5	6'	Black	16/3	SJT	6.95	5.95	5.35	4.79
1537230	LL34877	JVP	.72	5	8'	Black	16/3	SJT	7.95	6.95	6.25	5.59
125541	17504℞	JVP	.72	5	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79
2172981	1181924	JVP	.95	5	10'	Black	14/3	SJT	8.95	7.95	6.95	5.95

#.55" x .62" strain relief †European standard insulation color code §RFI filter on cord

3-Conductor Detachable Power Cords (Shielded) 290B/386A Plugs

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	100
213874	17660BG	JVP	.40	5	6'	Beige	18/3	SVT	$4.25	$3.79	$3.49	$2.95
161761	17742	SLA	.40	5	6'	Black	18/3	SVT	4.49	3.95	3.59	2.95

3-Conductor Computer Power Supply Extension Cords (150/386A/910 Plugs)

2125317	LL90989	JVP	.15	6B	1'6"	Black	18/3	SVT	$1.39	$1.25	$1.15	$1.05
206172	PEC-3℞	JVP	.22	6A	3'	Black	18/3	SVT	2.49	1.95	1.75	1.49
319804	LR94903	JVP	.82	6A	6'	Gray	18/3	SVT	1.75	1.59	1.35	1.09
28468	PEC	JVP	.36	6A	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2133595	PEC-SJT	JVP	.36	6A	6'	Black	18/3	SJT	4.95	4.49	3.95	3.49
420224	10W1-02212	JVP	.53	6A	12'	Black	18/3	SVT	5.95	5.39	4.79	4.25

3-Conductor Power Cords with Pigtail (Unshielded) 910 or 386 Plug

340056	17537℞	JVP	.37	7A	9'10"	Black	18/3	SJT	$1.95	$1.85	$1.69	$1.45
340099	17539℞	JVP	.80	7A	9'10"	Black	16/3	SJT	1.95	1.85	1.69	1.45

3-Conductor Power Cord with Pigtail (Shielded) 910 Plug

339995	72WV866SSDI℞	JVP	.49	7A	6'7"	Black	18/3	SVT	$1.95	$1.75	$1.49	$1.35

3-Conductor Right Angle Detachable Power Cords (Unshielded) 290B/910 Plugs

117357	8120-6177℞	JVP	.41	8B	6'	Gray	18/3	SVT	$3.95	$3.55	$3.19	$2.79
38077	17250R℞	JVP	.54	8B	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2099999	E88265	JVP	.82	8A	8'	Black	18/3	SVT	1.95	1.75	1.49	1.09
177384	17507℞	JVP	.28	8B	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49

3-Conductor Right Angle Detachable Power Cord (Shielded) 290B/910 Plugs

173252	17745℞	JVP	.16	8B	6'7"	Black	18/3	SVT	$5.95	$5.39	$4.79	$4.25

3-Conductor Hospital Grade Power Cords (green dot)

2115434	LL39965	JVP	.75	9	10'	Gray	18/3	SJT	$5.95	$5.25	$4.59	$3.95
132011	17006G℞	JVP	.82	9	10'	Gray	16/3	SJT	10.95	9.95	8.95	7.95

3-Conductor Computer Monitor Power Adapter Cord (150/386 Plugs)

177448	MPC1℞	JVP	.16	10	1'	Black	18/3	SVT	$2.95	$2.69	$2.39	$2.19

3-Conductor Detachable Power Cords (Power Strip Saver) 290B/386 Plugs

208339	P55-BR℞	JVP	.16	11	1'	Beige	18/3	SVT	$2.95	$2.69	$2.39	$2.15
199778	PSS-1℞	JVP	.16	11	1'	Black	18/3	SVT	2.95	2.69	2.39	2.15

3-Conductor Power Cord ("Y" Type Power Strip Saver II) 290B/386 (2) Plugs

208347	121-2594℞	ZTK	.38	12	22"	Black	16/3	SJT	$8.95	$7.95	$7.49	$6.95

3-Conductor Power Cord ("Y" Twin End) 150/386 (2) Plugs

340566	17268A℞	JVP	.32	13	4'	Black	18/3	SJT	$6.95	$6.25	$5.59	$4.95

3-Conductor "Mickey Mouse" Style Power Supply Cords

1953559	MMFLAT	MWL	.40	14	6'	Black	18/3	SPT-2	$2.59	$2.25	$1.95	$1.59
1951123	MMPC℞	MWL	.40	14	6'	Black	18/3	SVT	2.95	2.59	2.29	1.95

*Thermoplastic Cord Jacket Type: **SPT-2 (Flat):** Junior duty; **SVT (Round):** Light service; **SJT (Round):** Junior service

*JVP = Jameco ValuePro | MWL = Mean Well | SLA = Sola | ZTK = Ziotek

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Open-Frame Switching AC-to-DC Power Supplies

★Web Code: OSP

- Universal AC input/full range • Two-year warranty • Short-circuit, overload and overvoltage protection
- **PFC Model:** • Built-in active Power Factor Correction function, power factor >0.93 • Three-year warranty

Complete specifications available online

PPS-125

LPP-150

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 10
Single Output														
2188692	TDK-Lambda	ZWS5-5	+5V @ 1A	5W	85-265 @ 47-440	3.8x1.8x0.8	3.6x1.5x0.1	120	2.0	1.0	—	UL/CSA/TUV/CE	$10.95	$9.95
2188730	Phihong	PSA-10L-050	+5V @ 2A	10W	85-264 @ 47-440	4.0x1.8x0.8	3.8x1.6x0.3	80	2.0	1.0	—	UL/CSA/TUV	12.95	11.95
229042	Phihong	PSA15LN3-050	+5V @ 0-3A	15W	90-264 @ 47-63	4.3x1.6x0.9	4.0x1.3x0.2	50	2.0	1.0	—	UL/CUL/TUV/CE	18.95	17.25
212354	Mean Well	PS-25-5	+5V @ 0-5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	—	UL/CUL/TUV/CE	11.95	10.49
217332	Mean Well	PS-45-5	+5V @ 0-8A	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	—	UL/CUL/TUV/CE	12.49	11.49
201938	Mean Well	PS-65-5	+5V @ 0-13.8A	60W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	1.0	4.0	--	UL/CUL/TUV/CE	13.95	12.95
392826	Mean Well	PS-25-7.5	+7.5V @ 3.3A	24.8W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.14	80	2.0	0.5	—	UL/TUV/EN	11.95	10.49
2188772	UMEC	UP0401S-09	+9V @ 4.4A	40W	90-264 @ 47-63	4.0x3.0x1.0	3.6x2.6x0.2	100	1.0	1.0	—	UL/CSA/TUV	12.95	11.95
2105666	Mean Well	PS-15-12	+12V @ 0-1.25A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.9x0.1	150	0.5	0.5	--	CB/CE	7.95	6.95
148604	Mean Well	PS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	11.95	10.49
213728	Mean Well	PS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	12.49	11.49
2205413	Astrodyne	ASM60-1380**	+12V @ 0-5A	60W	100-240 @ 50-60	4.0x2.0x1.7	3.7x1.7x0.1	100	3.0	1.0	—	UL/CUL/TUV/CE	12.95	11.95
148639	Mean Well	PS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.15	100	2.0	1.0	—	UL/CUL/TUV/CE	13.95	12.95
2099981	ITE	SBU60-105	+12V @ 5.25A	63W	90-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.15	120	3.0	0.5	—	UL/CUL/CE	8.95	7.95
374089	Mean Well	PPS-125-12	+12V @ 0-8.5A	126W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	✔	UL/CUL/TUV/CE	45.95	40.49
213681	Mean Well	LPP-150-12	+12V @ 0-12.5A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.15	100	1.0	0.5	✔	UL/CUL/TUV/CE	37.95	34.95
374380	Mean Well	PS-65-13.5	+13.5V @ 0-5.4A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.16	100	2.0	1.0	—	UL/CUL/TUV/CE/CB	13.95	12.95
2105674	Mean Well	PS-15-15	+15V @ 0-1A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.6x1.0	120	1.0	1.0	—	UL/TUV/CB/CE	4.95	4.49
216769	Mean Well	PS-25-15	+15V @ 0-1.7A	25.5W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	11.95	10.49
216751	Mean Well	PS-65-15	+15V @ 0-4.2A	63W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	13.95	12.95
216670	Mean Well	LPP-100-15	+15V @6.7A	100W	85-264 @ 47-63	8.7x2.4x1.3	8.3x2.0x0.14	100	0.5	0.5	✔	UL/CUL/TUV/CE	34.95	31.95
2122491	Mean Well	PLP-20-24	+24V @ 0-0.8A	19.2W	90-277 @ 47-63	5.5x1.3x0.8	5.2x1.0x0.1	300	10.0	3.0	✔	UL/CUL/TUV/CE	14.95	12.49
212346	Mean Well	PS-25-24	+24V @ 0-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	—	UL/CUL/TUV/CE	11.95	10.49
1919035	Mean Well	PS-35-24	+24V @ 0-1.5A	36W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	—	UL/CUL/TUV/CE	12.49	11.49
213720	Mean Well	PS-45-24	+24V @ 0-1.9A	45.6W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.49	11.49
148647	Mean Well	PS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	13.95	12.95
2129633	Elpac	MS6524F**	+24V @ 2.7A	65W	100-240 @ 50-60	5.0x3.0x1.2	4.5x2.5x0.2	100	5.0	5.0	—	UL/CSA/TUV/CE	5.95	4.95
244727	Mean Well	LPS-75-24	+24V @ 0-3.5A	76.8W	90-264 @ 47-63	8.7x2.2x1.2	8.4x1.8x0.2	120	1.0	1.0	✔	UL/CUL/TUV/CE	19.95	17.49
173463	Mean Well	LPS-100-24	+24V @ 0-4.2A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	✔	UL/CUL/TUV/CE	31.95	28.95
2129684	Elpac	MSM7524**	+24V @ 4.6A	110.0W	100-240 @ 50-60	5.7x3.4x1.6	5.2x3.4x1.5	240	3.0	1.0	—	UL/CUL/CE	13.95	12.49
301429	Mean Well	PPS-125-24	+24V @ 0-5.2A	124.8W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	150	1.0	0.5	✔	UL/CUL/TUV/CE	45.95	40.49
213672	Mean Well	LPP-150-24	+24V @ 0-6.3A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	150	0.5	0.5	✔	UL/CUL/TUV/CE	37.95	34.95
668730	Mean Well	PPS-200-24	+24V @ 0-8.3A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	3.7x7.8x0.14	150	1.0	0.5	✔	UL/CUL/TUV/CE	64.95	54.95
201954	Mean Well	PS-65-48	+48V @ 0-1.5A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.16	100	2.0	1.0	—	UL/CUL/TUV/CE/CB	13.95	12.95
Double Output														
2188617	Powdec	CML0522	+5V @ 0-1.5A; +12V @ 0-0.6A	15W	100-240 @ 50-60	3.5x2.3x1.1	3.1x2.0x0.1	50	4.0	2.0	—	UL/CSA/TUV/CE	$11.95	$10.95
212312	Mean Well	PD-2505	+5V @ 0.1-3A; -5V @ 0.1-2.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	4.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
212338	Mean Well	PD-25A	+5V @ 0.2-2.5A; +12V @ 0.1-1.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
212330	Mean Well	PD-25B	+5V @0.2-2A; +24V @ 0.1-1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
194862	Mean Well	PD-45A	+5V @ 0.4-3.2A; +12V @ 0.2-2	40W	90-264 @ 47-440	5.0x2.5x1.5	4.5x2.5x0.2	50	3.0	1.0	—	UL/CSA	14.95	13.49
2197741	Skynet	SNP-N563	+5V @ 1.0-8A; +3.3V @ 0.5-6A	60W	85-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL	11.95	10.95
194889	Mean Well	PD-65A	+5V @ 0.4-7A; +12V @ 0.2-3.2A	61.1W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	14.49	13.49
692377	Autec	UPS65-1002	+5V @ 0.5-3.5A; +12V @ 0.1-4A	65W	90-260 @ 47-63	6.0x3.5x1.5	4.8x3.2x0.2	50	2.0	0.5	—	UL/CSA/TUV	13.95	11.95
194897	Mean Well	PD-65B	+5V @ 0.4-3.5A; +24V @ 0.2-2A	65.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
148690	Mean Well	PD-2512	+12V @ 0.1-1.2A; -12V @ 0.1-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
2100857	Mean Well	PD-25-15	+15V @ 1A, -5V @ 1A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
Triple Output														
2081617	Artesyn	NFN40-7607	+5V @ 3A; +12V @ 2A; -5V @ 0.35A	40W	85-264 @ 47-440	5.0x3.0x1.2	4.6x2.6x0.15	50	2.0	1.0	—	UL/CSA/TUV	$7.95	$6.95
2129676	Elpac	MSM40D**	+5.1V @ 4A; +24V @ 1A; -12V @ 0.4A	40W	100-240 @ 50-60	5.0x3.0x1.1	4.6x2.5x0.2	50	5.0	5.0	—	UL/CUL/CSA/CE	10.95	9.95
229122	Phihong	PSA4531	+5V @ 0-4A; +12V @ 0-1.5A; -12V @ 0-0.5A	44W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.2	50	2.0	1.0	—	UL/CSA/TUV/CE	33.95	31.49
88402	Mean Well	PT-45B	+5V @ 0.4-3A; +12V @ 0.2-2A; -12V @ 0-0.3A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
216734	Mean Well	PT-65B	+5V @ 0.4-5.5A; +12V @ 0.2-2.5A -12V @ 0-0.5A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.49
216726	Mean Well	PT-65C	+5V @ 0.4-5.5A; +15V @ 0.2-2A; -15V @ 0-0.5A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.49
215707	Mean Well	PT-65D	+5V @ 0.5-5A; +12V @ 0.2-4A; +24V @ 0.2-1.3A	68W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	2.0	1.0	—	UL/CUL/TUV/CE	17.95	16.49

* Primary Output ** Medical rated

★*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box*

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Open-Frame Medical Switching AC-to-DC Power Supplies

- Universal AC input/full range
- 100% full-load burn-in test
- Soft-start circuit, limiting AC surge current
- Short-circuit, overload and overvoltage protection
- Load regulation: ±2.0%
- Line regulation: ±1.0%
- Voltage adjustment: 10%
- Inrush current: 20A @ 120VAC
- 2129633/2129676: ±5% load/line regulation
- Leakage current: 0.3mA @ 240V
- Isolation voltage: 4000VAC
- 2.9 watts/in³ max.
- Working temp.: -10˚C to + 60˚C
- Mating connector: P/N 104732, see Web
- 2129684: ±1% line, ±3% load regulation

MPS-65

Performance at Value Prices

★Web Code: JBK

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Ripple & Noise (mV p-p)*	Certification	Pricing: 1	Pricing: 10
2205413	Astrodyne	ASM60-1380	+12V @ 0-5.0A	60.0W	100-240 @ 50-60	100	UL/CUL/TUV/CE	$12.95	$11.95
221154	Mean Well	MPS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	100	UL/CUL/TUV/CE	20.95	18.95
2129633	Elpac	MS6524F	+24V @ 2.7A	65.0W	85-264 @ 50-60	240	UL/CSA/TUV/CE	5.95	4.95
2129684	Elpac	MSM7524F	+24V @ 4.6A	110.0W	90-264 @ 47-63	240	UL/CUL/CE	13.95	12.49
2129676	Elpac	MSM40D	+5.1V @ 4A; +24V @ 1A; -12V @ 0.4A	110.0W	90-264 @ 47-63	50	UL/CUL/CSA/CE	10.95	9.95

* Primary Output

Enclosed Switching AC-to-DC Power Supplies

- 100% full-load burn-in test
- Wide AC input range
- Manufacturer warranty varies

★Web Code: EPS

Complete specifications available online

SP-150

HRPG-150

HRP-300

RSP-1500

NES-75

SE-600

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing: 1	Pricing: 10
Single Output												
2106685	Mean Well	RS-15-3.3	+3.3V @ 0-3A	9.9W	2.5 x 2.0 x 1.1	80	2.0	0.5	—	UL/CUL/TUV/CE/CB	$9.95	$8.95
693193	Mean Well	RS-25-3.3	+3.3V @ 0-6A	19.8W	3.0 x 2.0 x 1.1	80	2.0	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
201903	Mean Well	SP-150-3.3	+3.3V @ 0-30A	99W	7.0 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
1919043	Mean Well	RS-15-5	+5V @ 0-3A	15W	2.5 x 2.0 x 1.1	80	1.5	0.5	—	UL/CUL/TUV/CE/CB	9.95	8.95
323282	Mean Well	RS-25-5	+5V @ 0-5A	25W	3.1 x 2.0 x 1.1	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
323329	Mean Well	RS-35-5	+5V @ 0-7A	35W	3.9 x 3.2 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
123290	Mean Well	S-40-5	+5V @ 0-8A	40W	5.1 x 3.9 x 1.5	75	1.0	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323388	Mean Well	RS-50-5	+5V @ 0-10A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
323581	Mean Well	RS-75-5	+5V @ 0-12A	60W	5.1 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	17.95	15.95
194830	Mean Well	SP-75-5	+5V @ 0-15A	75W	7.0 x 3.9 x 1.3	80	1.0	0.5	✔	UL/CUL/TUV/CE/CB	32.95	29.95
323708	Mean Well	RS-100-5	+5V @ 0-16A	80W	6.3 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.95
194791	Mean Well	SP-100-5	+5V @ 0-20A	100W	7.0 x 3.9 x 1.8	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	39.95	35.95
323821	Mean Well	RS-150-5	+5V @ 0-26A	130W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
123394	Mean Well	S-150-5	+5V @ 0-30A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.95
201912	Mean Well	SP-150-5	+5V @ 0-30A	150W	7.0 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
202042	Mean Well	SP-200-5	+5V @ 0-40A	200W	7.0 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
244735	Mean Well	SP-320-5	+5V @ 0-55A at 230VAC; 0-44A at 115VAC	275W	8.5 x 4.5 x 2.0	150	1.0	0.5	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2149562	Mean Well	SE-350-5	+5V @ 0-60A	300W	8.5 x 4.5 x 2.0	150	2.0	0.5	—	UL/CUL	43.95	39.95
693644	Mean Well	SP-480-5	+5V @ 0-85A	425W	10.9 x 5.0 x 1.7	80	1.0	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
374002	Mean Well	SE-600-05	+5V @ 0-100A	500W	9.7 x 5.0 x 2.5	150	2.0	0.5	—	UL/CUL	89.95	79.95
693661	Mean Well	SP-750-5	+5V @ 0-120A	600W	10.9 x 5.0 x 2.5	120	2.0	0.5	✔	UL/CUL/TUV/CE/CB	204.95	189.95
123415	Mean Well	S-150-7.5	+7.5V @ 0-20A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.95
394215	Mean Well	SP-320-7.5	+7.5V @ 0-40A	300W	8.5 x 4.5 x 2.0	150	1.0	0.5	✔	UL/CUL/TUV/CE/CB	61.95	55.95
1919051	Mean Well	RS-15-12	+12V @ 0-1.3A	15.6W	2.5 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	9.95	8.95
323300	Mean Well	RS-25-12	+12V @ 0-2.1A	25.2W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
123255	Mean Well	S-25-12	+12V @ 0-2.1A	25.2W	3.9 x 3.8 x 1.4	100	0.5	0.5	—	UL/TUV/CE	18.95	16.95
323337	Mean Well	RS-35-12	+12V @ 0-3A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
123298	Mean Well	S-40-12	+12V @ 0-3.5A	42W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323396	Mean Well	RS-50-12	+12V @ 0-4.2A	50.4W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
123335	Mean Well	S-60-12	+12V @ 0-5A	60W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
1918921	Mean Well	CLG-60-12	+12V @ 0-5A	60W	6.8 x 2.4 x 1.5	2000	5.0	3.0	✔	UL/CUL/TUV/CE	40.95	36.95

* Primary Output

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Enclosed Switching AC-to-DC Power Supplies (Continued)

Complete specifications available online

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

★Web Code: EPS

PSP-600


RS-25

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)												
323599	Mean Well	RS-75-12	+12V @ 0-6A	72W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	$17.95	$15.95
194838	Mean Well	SP-75-12	+12V @ 0-6.3A	75.6W	7.0 x 3.9 x 1.3	80	0.5	0.5	✔	UL/CUL/TUV/CE/CB	32.95	29.95
2105017	Mean Well	NES-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/CE/CB	21.95	19.49
123386	Mean Well	S-100F-12	+12V @ 0-8.5A	102W	7.8 x 3.9 x 1.5	125	0.5	0.5	—	UL/TUV/CE/CB	29.95	27.95
323716	Mean Well	RS-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	✔	UL/CUL/TUV/CE/CB	23.95	21.95
194803	Mean Well	SP-100-12	+12V @ 0-8.5A	102W	7.0 x 3.9 x 1.8	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	35.95
123423	Mean Well	S-150-12	+12V @ 0-12.5A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
323839	Mean Well	RS-150-12	+12V @ 0-12.5A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
173421	Mean Well	SP-150-12	+12V @ 0-12.5A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
2094848	Mean Well	HRPG-150-12	+12V @ 0-13A	156W	6.3 x 3.8 x 1.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	69.95	63.95
2138839	Globe Tek	SP-200-12GL(R)	+12V @ 0-16.7A	200.4W	7.8 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE	19.95	17.95
194774	Mean Well	SP-200-12	+12V @ 0-16.7A	200.4W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2101497	Mean Well	SP-240-12	+12V @ 0-20A	240W	7.5 x 3.7 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	51.95	47.95
207204	Mean Well	S-320-12	+12V @ 0-25A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
244743	Mean Well	SP-320-12	+12V @ 0-25A at 230VAC; 0-20A @ 115VAC	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2102203	Mean Well	HRP-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	84.95	76.95
2094872	Mean Well	HRPG-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	94.95	84.95
2149503	Mean Well	SE-350-12	+12V @ 0-29A	348W	8.5 x 4.5 x 2.0	150	1.0	0.5	—	UL/CUL	43.95	39.95
2094928	Mean Well	SE-450-12	+12V @ 0-37.5A	450W	8.9 x 4.9 x 2.0	200	1.0	0.5	✔	UL/CUL	69.95	62.95
2122319	Mean Well	HRP-450-12	+12V @ 0-37.5A	450W	8.6 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	124.95	114.95
301373	Mean Well	SP-480-12	+12V @ 0-40A at 230VAC; 0-36A @ 115VAC	480W	10.9 x 5.0 x 1.7	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	134.95	119.95
190693	Mean Well	SP-500-12	+12V @ 0-40A at 230VAC; 0-34A @ 115VAC	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	134.95
374011	Mean Well	SE-600-12	+12V @ 0-50A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	88.95	79.95
374214	Mean Well	PSP-600-12	+12V @ 0-50A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
2094961	Mean Well	HRPG-600-12	+12V @ 0-53A	636W	8.6 x 4.1 x 2.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	149.95	134.95
319944	Mean Well	SP-750-12	+12V @ 0-62A	750W	10.9 x 5.0 x 2.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	204.95	189.95
202025	Mean Well	S-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
394193	Mean Well	SP-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
212410	Mean Well	SP-200-13.5	+13.5V @ 0-14.9A	201.1W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
693599	Mean Well	SP-320-13.5	+13.5V @ 0-22A	297W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	61.95	55.95
212389	Mean Well	SP-500-13.5	+13.5V @ 0-36A at 230VAC; 0-30.6A @ 115VAC	486W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	134.95
2106079	Mean Well	PSP-600-13.5	+13.5V @ 0-44.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
2105447	Mean Well	AD-55A†	+13.8V @ 0-4A	51.4W	6.3 x 3.8 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	33.95	29.95
2105439	Mean Well	AD-155A†	+13.8V @ 0-5A 10.5A	151.6W	7.8 x 4.3 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	54.95	48.95
1919060	Mean Well	RS-15-15	+15V @ 0-1A	15W	2.5 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	9.95	8.95
323302	Mean Well	RS-25-15	+15V @ 0-1.7A	25.5W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
323345	Mean Well	RS-35-15	+15V @ 0-2.4A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
323409	Mean Well	RS-50-15	+15V @ 0-3.4A	51W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
123343	Mean Well	S-60-15	+15V @ 0-4A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323602	Mean Well	RS-75-15	+15V @ 0-5A	75W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	15.95
194845	Mean Well	SP-75-15	+15V @ 0-5A	75W	7.0 x 3.8 x 1.3	80	0.5	0.5	✔	UL/CUL/TUV/CE/CB	32.95	29.95
212433	Mean Well	SP-100-15	+15V @ 0-6.7A	100.5W	7.0 x 3.9 x 1.8	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	35.95
323724	Mean Well	RS-100-15	+15V @ 0-7A	105W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.95
123432	Mean Well	S-150-15	+15V @ 0-10A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
323847	Mean Well	RS-150-15	+15V @ 0-10A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
173412	Mean Well	SP-150-15	+15V @ 0-10A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
2094856	Mean Well	HRPG-150-15	+15V @ 0-10A	150W	6.3 x 3.8 x 1.5	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	69.95	63.95
202060	Mean Well	SP-200-15	+15V @ 0-13.4A	201W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
693610	Mean Well	SP-320-15	+15V @ 0-20A	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2149511	Mean Well	SE-350-15	+15V @ 23.2A	350W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	43.95	39.95
693652	Mean Well	SP-480-15	+15V @ 0-35A	480W	10.9 x 5.0 x 1.7	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	134.95	119.95
291522	Mean Well	SE-600-15	+15V @ 0-40A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	88.95	79.95
374222	Mean Well	PSP-600-15	+15V @ 0-40A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
1585696	Mean Well	RSP-1000-15	+15V @ 0-50A	750W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE	249.95	229.95

*Primary Output † UPS function

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies



SP-500

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)												
694920	Mean Well	RSP-1500-15	+15V @ 0-100A	1500W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	$349.95	$324.95
1919078	Mean Well	RS-15-24	+24V @ 0-0.625A	15W	2.5 x 2.0 x 1.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	9.95	8.95
123272	Mean Well	S-25-24	+24V @ 0-1.1A	26.4W	3.9 x 3.8 x 1.4	100	0.5	0.5	—	UL/TUV/CE	18.95	16.95
323311	Mean Well	RS-25-24	+24V @ 0-1.1A	26.4W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
323353	Mean Well	RS-35-24	+24V @ 0-1.5A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
123319	Mean Well	S-40-24	+24V @ 0-1.8A	43W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323417	Mean Well	RS-50-24	+24V @ 0-2.2A	52.8W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
2104225	Mean Well	NES-50-24	+24V @ 2.2A	53W	5.1 x 3.9 x 1.5	200	0.5	0.5	—	UL/CUL/CB/CE	16.95	14.95
123352	Mean Well	S-60-24	+24V @ 0-2.5A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323620	Mean Well	RS-75-24	+24V @ 0-3.2A	76.8W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	15.95
2104250	Mean Well	NES-75-24	+24V @ 0-3.2A	76.8W	6.3 x 3.8 x 1.5	200	0.5	0.5	—	UL/CUL/CE/CB	18.95	16.95
194854	Mean Well	SP-75-24	+24V @ 0-3.2A	76.8W	7.0 x 3.9 x 1.3	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	32.95	29.95
194812	Mean Well	SP-100-24	+24V @ 0-4.2A	100.8W	7.0 x 3.9 x 1.8	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	35.95
201971	Mean Well	S-100F-24	+24V @ 0-4.5A	108W	7.8 x 3.9 x 1.5	150	0.5	0.5	—	UL/TUV/CE/CB	29.95	27.95
323732	Mean Well	RS-100-24	+24V @ 0-4.5A	108W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.95
155651	Power One	MAP110-1024CM	+24V @ 5A or +28V @ 4.3A	120W	7.0 x 4.3 x 1.8	240	0.5	1.0	—	UL/CSA/TUV	24.95	21.95
173404	Mean Well	SP-150-24	+24V @ 0-6.25A	150W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
123450	Mean Well	S-150-24	+24V @ 0-6.5A	156W	7.0 x 4.3 x 2.0	240	0.2	0.2	—	UL/CUL/TUV/CE/CB	34.95	31.95
323855	Mean Well	RS-150-24	+24V @ 0-6.5A	156W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
2101868	Mean Well	HRP-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	60.95	54.95
2094864	Mean Well	HRPG-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	69.95	63.95
2135523	TDK/Lambda	HWS150-24/A	+24V @ 0-6.5A	156W	6.3 x 1.7 x 3.2	150	0.5	0.3	—	UL/CSA/CE/EN/IEC	49.95	46.95
194782	Mean Well	SP-200-24	+24V @ 0-8.4A	201.6W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2101518	Mean Well	SP-240-24	+24V @ 0-10A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	51.95	47.95
196657	Mean Well	S-320-24	+24V @ 0-12.5A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
244752	Mean Well	SP-320-24	+24V @ 0-13A	312W	8.5 x 4.5 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2102220	Mean Well	HRP-300-24	+24V @ 0-14A	336W	7.7 x 4.1 x 1.6	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	84.95	76.95
2094881	Mean Well	HRPG-300-24	+24V @ 0-14A	336W	7.8 x 4.1 x 1.6	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	94.95	84.95
2146564	Mean Well	SE-350-24	+24V @ 0-14.6A	350.4W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	43.95	39.95
2101606	Mean Well	SE-450-24	+24V @ 0-18.8A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	—	UL/CUL	69.95	62.95
2122335	Mean Well	HRP-450-24	+24V @ 0-18.8A	451.2W	8.6 x 4.1 x 1.6	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	124.95	114.95
301322	Mean Well	SP-480-24	+24V @ 0-22A	480W	10.9 x 5.0 x 1.7	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	134.95	119.95
147054	Mean Well	SP-500-24	+24V @ 0-20A	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	134.95
295902	Mean Well	SE-600-24	+24V @ 0-25A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	88.95	79.95
374231	Mean Well	PSP-600-24	+24V @ 0-25A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
320048	Mean Well	SP-750-24	+24V @ 0-31.3A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	✔	UL/CUL/TUV/CE/CB	204.95	189.95
1585717	Mean Well	RSP-1000-24	+24V @ 0-40A	960W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	249.95	229.95
2101569	Mean Well	SE-1000-24	+24V @ 0-41.7A	1000.8W	10.9 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	184.95	169.95
694938	Mean Well	RSP-1500-24	+24V @ 0-63A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	349.95	324.95
693409	Mean Well	SP-75-27	+27V @ 0-2.8A	75.6W	7.0 x 3.9 x 1.3	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	32.95	29.95
693513	Mean Well	SP-150-27	+27V @ 5.6A	151W	7.8 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CB/CE	42.95	38.95
693548	Mean Well	SP-200-27	+27V @ 0-7.5A	202.5W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
693581	Mean Well	S-320-27	+27V @ 0-11.0A	297W	8.5 x 4.5 x 2.0	200	0.5	0.5	—	UL/CUL	59.95	54.95
693628	Mean Well	SP-320-27	+27V @ 0-11.7A	315.9W	8.5 x 4.5 x 2.0	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2149520	Mean Well	SE-350-27	+27V @ 13A	351W	8.5 x 4.5 x 2.0	200	0.5	0.5	—	UL/CUL	43.95	39.95
190706	Mean Well	SP-500-27	+27V @ 0-18A	486W	6.7 x 4.7 x 3.7	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	134.95
295911	Mean Well	SE-600-27	+27V @ 0-22.2A	599.4W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	88.95	79.95
374257	Mean Well	PSP-600-27	+27V @ 0-22.2A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
374038	Mean Well	SP-750-27	+27V @ 0-27.8A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	✔	UL/CUL/TUV/CE/CB	204.95	189.95
1585709	Mean Well	RSP-1000-27	+27V @ 0-37.0A	999W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	249.95	229.95
694946	Mean Well	RSP-1500-27	+27V @ 0-56A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	349.95	324.95
2102983	Mean Well	PB-120N-27C	+27.6V @ 0-4.3A	118.7W	7.1 x 3.8 x 1.9	150	§	§	—	UL/CUL/TUV/CE/CB	44.95	39.95

*Primary Output § Load/line regulation is dependent on battery current requirement

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

SP-200

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)												
2146118	Mean Well	AD-155B	+27.6V @ 0-5.5A	152W	7.8 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	$54.95	$48.95
2102473	Mean Well	SP-240-30	+30V @ 0-8A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	51.95	47.95
2101024	Mean Well	HRP-75-36	+36V @ 0-2.1A	75.6W	5.1 x 3.9 x 1.5	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	45.95	40.49
2102730	Mean Well	SP-320-36	+36V @ 0-8.8A	316.8W	8.5 x 4.5 x 2.0	220	0.5	0.2	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2104524	Mean Well	SE-600-36	+36V @ 0-16.6A	598W	9.7 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	88.95	79.95
2101753	Mean Well	HRPG-600-36	+36V @ 0-17.5A	630W	8.6 x 4.1 x 2.5	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	149.95	134.95
693206	Mean Well	RS-25-48	+48V @ 0-0.57A	27.4W	3.1 x 2.0 x 1.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	11.95	10.95
693249	Mean Well	RS-50-48	+48V @ 0-1.1A	52.8W	3.9 x 3.8 x 1.4	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
216793	Mean Well	S-100F-48	+48V @ 0-2.2A	105.6W	7.8 x 3.9 x 1.5	150	0.5	0.5	—	UL/TUV/CE/CB	14.95	13.95
693290	Mean Well	RS-100-48	+48V @ 0-2.3A	110.4W	6.3 x 3.8 x 1.5	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.95
167346	Mean Well	S-150-48	+48V @ 0-3.2A	153.6W	7.0 x 4.3 x 2.0	240	0.2	0.2	—	UL/CUL/TUV/CE/CB	34.95	31.95
201930	Mean Well	SP-150-48	+48V @ 0-3.2A	153.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	✔	UL/CUL/TUV/CE/CB	42.95	38.95
323863	Mean Well	RS-150-48	+48V @ 0-3.3A	158.4W	7.8 x 3.9 x 1.5	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
202068	Mean Well	SP-200-48	+48V @ 0-4.2A	201.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2102481	Mean Well	SP-240-48	+48V @ 0-5A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	51.95	47.95
2197855	TDK Lambda	SWS300-48	+48V @ 0-6.7A	321.6W	7.8 x 4.0 x 2.0	240	0.1	0.2	✔	UL/CSA/CE	59.95	54.95
244770	Mean Well	SP-320-48	+48V @ 0-6.7A	321.6W	8.5 x 4.5 x 2.0	240	0.5	0.2	✔	UL/CUL/TUV/CE/CB	61.95	55.95
2102326	Mean Well	HRP-300-48	+48V @ 0-7.0A	336W	7.8 x 4.1 x 1.6	250	0.5	0.2	✔	UL/CUL/TUV/CE/CB	84.95	76.95
2149554	Mean Well	SE-350-48	+48V @ 0-7.3A	350W	8.5 x 4.5 x 2.0	240	0.5	0.5	—	UL/CUL	43.95	39.95
2105164	Mean Well	SE-450-48	+48V @ 0-9.4A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	—	UL/CUL	69.95	62.95
301402	Mean Well	SP-480-48	+48V @ 0-11A	480W	10.9 x 5.0 x 1.7	240	0.5	0.2	✔	UL/CUL/TUV/CE/CB	134.95	119.95
161796	Mean Well	SP-500-48	+48V @ 0-10A	480W	6.7 x 4.7 x 3.7	300	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	134.95
295929	Mean Well	SE-600-48	+48V @ 0-12.5A	600W	9.7 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	88.95	79.95
374249	Mean Well	PSP-600-48	+48V @ 0-12.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	134.95	119.95
2101577	Mean Well	SE-1000-48	+48V @ 0-20.8A	998.4W	10.9 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	184.95	169.95
1585725	Mean Well	RSP-1000-48	+48V @ 0-21.0A	1008W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	249.95	229.95
694954	Mean Well	RSP-1500-48	+48V @ 0-32.0A	1536W	10.9 x 5.0 x 3.3	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	349.95	324.95
2108921	Mean Well	RSP-3000-48	+48V @ 0-62.5A	3000W	10.9 x 7.0 x 2.5	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	499.95	449.95
Double Output												
323362	Mean Well	RD-35A	+5V @ 0.3-4A; +12V @ 0.2-1A	32W	3.9 x 3.2 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	$14.49	$13.49
323380	Mean Well	RD-35B	+5V @ 0.3-4A; +24V @ 0.2-1.3A	51.2W	3.9 x 3.2 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.49	13.49
323425	Mean Well	RD-50A	+5V @ 0.3-6A; +12V @ 0.3-3A	54W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323433	Mean Well	RD-50B	+5V @ 0.3-6A; +24V @ 0.2-2A	53.6W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323505	Mean Well	RD-65A	+5V @ 0.3-8A; +12V @ 0.2-4A	66W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	26.95	23.95
323513	Mean Well	RD-65B	+5V @ 0.3-8A; +24V @ 0.2-3A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	26.95	23.95
323628	Mean Well	RD-85A	+5V @ 2.0-10A; +12V @ 0.3-5A	88W	6.3 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	37.95	33.49
132397	Mean Well	D-120B	+5V @ 2.0-6A; +24V @ 0.4-4A	126W	7.0 x 3.9 x 2.0	60	0.5	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
323741	Mean Well	RD-125A	+5V @ 2.0-15A; +12V @ 0.5-10A	130.9W	7.8 x 3.9 x 1.5	80	3.0	1.0	—	UL/CUL/TUV/CE/CB	32.95	29.95
323759	Mean Well	RD-125B	+5V @ 2.0-10A; +24V @ 0.4-5A	133.4W	7.8 x 3.9 x 1.5	80	3.0	1.0	—	UL/CUL/TUV/CE/CB	32.95	29.95
2106124	Mean Well	RD-125-1224	+12V @ 1.0-3.7A; +24V @ 0.4-3.7A	133.2W	7.8 x 3.9 x 1.5	120	1.0	0.5	—	UL/CUL/TUV/CE/CB	32.95	29.95
Triple Output												
201989	Mean Well	T-40A	+5V @ 0.6-3A; +12V @ 0.2-2A; -5V @ 0.1-0.5A	41.5W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	CSA/CE	$22.95	$21.95
323460	Mean Well	RT-50B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	20.95	19.49
323468	Mean Well	RT-50C	+5V @ 0-5A; +15V @ 0.2-2A; -15V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	20.95	19.49
323476	Mean Well	RT-50D	+5V @ 0.5-5A; +12V @ 0.1-1A; +24V @ 0.2-1.5A	51W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	20.95	19.49
123482	Mean Well	T-60B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	61W	6.3 x 3.8 x 1.5	100	1.0	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
323540	Mean Well	RT-65B	+5V @ 0.5-8A; +12V @ 0.2-3.5A; -12V @ 0-1A	64.6W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323548	Mean Well	RT-65C	+5V @ 0.5-8A; +15V @ 0.2-3A; -15V @ 0-1A	65.5W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323555	Mean Well	RT-65D	+5V @ 0.5-8A; +12V @ 0.1-1A; +24V @ 0.2-2A	68W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323767	Mean Well	RT-125A	+5V @ 2-15A; +12V @ 0.5-6A; -5V @ 0.1-1A	131W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.49
323775	Mean Well	RT-125B	+5V @ 2-15A; +12V @ 0.5-6A; -12V @ 0.1-1A	132W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.49
323783	Mean Well	RT-125C	+5V @ 2-15A; +15V @ 0.5-6A; -15V @ 0.1-1A	132.5W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.49
323792	Mean Well	RT-125D	+5V @ 2-15A; +12V @ 0.1-2A; +24V @ 0.4-4A	136W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.49

*Primary Output

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies



RQ-65

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing: 1	Pricing: 10
Quad Output												
323484	Mean Well	RQ-50B	+5V @ 0.5-6A; +12V @ 0.2-1.5A; -5V @ 0-1A; -12V @ 0-1A	45.5W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	$26.95	$23.95
323564	Mean Well	RQ-65B	+5V @ 0.5-8A; +12V @ 0.2-3A; -5V @ 0-1A; -12V @ 0-1A	62.5W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
323572	Mean Well	RQ-65D	+5V @ 0.5-8A; +12V @ 0.2-3A; +24V @ 0.1-1.5A; -12V @ 0-1A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
323695	Mean Well	RQ-85D	+5V @ 2-10A; +12V @ 0.3-4A; +24V @ 0.1-1.5A; -12V @ 0-1A	84W	6.3 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.95
323803	Mean Well	RQ-125B	+5V @ 2-12A; +12V @ 0.5-4.5A; -5V @ 0.1-1A; -12V @ 0-1A	120W	7.0 x 3.9 x 2.0	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
323812	Mean Well	RQ-125D	+5V @ 2-12A; +12V @ 0.5-4A; +24V @ 0.1-2.5A; -12V @ 0-1A	124W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
213648	Mean Well	QP-150F	+5V @ 3-15A; +15V @ 0-5A; +24V @ 0.4-3A; -15V @ 0-1A	152W	7.8 x 3.9 x 1.5	120	2.0	1.0	✔	UL/CUL/TUV/CE/CB	89.95	79.95
213752	Mean Well	QP-200D	+5V @ 3-20A; +12V @ 0-6A +24V @ 0.4-5A; -12V @ 0-1A	204.9W	7.8 x 3.9 x 2.0	100	2.0	1.0	✔	UL/CUL/TUV/CE/CB	99.95	89.95
668764	Mean Well	QP-320D	+5V @ 2.5-20A; +12V @ 0-10A; +24V @ 0.2-5A; -12V @ 0.2-2A	316W	8.5 x 4.5 x 2.0	100	2.0	1.0	✔	UL/CUL/TUV/CE	119.95	108.95
2102861	Mean Well	QP-375-24C	+24V @ 1-10A; +5V @ 0-10A; +15V @ 0-4A; +15V @ 0-4A	375W	11.0 x 5.0 x 2.5	240	0.8	0.5	✔	UL/CUL/TUV/CE/CB	277.95	249.95

*Primary Output

Mounting Brackets & Accessories for Mean Well Enclosed Switching AC-to-DC Power Supplies

All brackets use metric screws: 2-F3 x 6, 2-F4 x 6, 2-T3 x 6, 2-T4 x 6 and 8-T4 x 6 (not included)

★Web Code: MBM

Part No.	Mfr. P/N	For Models	1	10
222122	DRL-01	S-25/40, RS-25/35	$.99	$.89
222131	DRL-02	S-50/60/100/150, SP-100/150/200, D-120	1.95	1.75
222148	DRL-03	S-240/320, SP-320	2.49	2.25
222165	DRP-02	S-15/25, SP-75/100/150/200	1.49	1.35
222173	DRP-03	All Models	1.49	1.25
222182	MHS012	S-320/350, SP-100/150/200/320	.49	.39
222199	MHS025	SP-500, PSP-600	.59	.49
2172666	2026.0	DR, DRH, DRP, DRT, MDR, TDR	7.95	6.95
248736	2094.0	DR, DRH, DRP, DRT, MDR	8.95	7.95
2150379	TBC-07	D/ID, NED, RD, NES, RS, T, S, SD, HRP, SC	.49	.45



222122 4.35"L x 1.73"W x 2.52"H
222148 7.875"L x 2.48"W x 1.80"H

222165
3.2"L x 2.0"W x 0.3"H

222182
.767"L x .60"W x .625"H

222199
5.51"L x 7.89"W x .068"H

248736 (Slotted) DIN Mounting Rail
Length: 1 meter

2172666 (Unslotted) DIN Mounting Rail
Length: 1 meter

2150379
2.25"L x 0.4"W

Mating Connector

103588 $1.70/10
Spade Solderless Terminal

Crimp Tool



72996 $24.95
Solderless Terminal Crimp Tool

High Efficiency, Small Density Open-Frame Power Supplies

★Web Code: OSP

EPP Series

NEW MARKED IN PINK

• Input: 90-264VAC @ 47-63Hz, 127-370VDC • Built-in active PFC function • Short-circuit, overload, over-voltage, over-temperature protection
• High efficiency • LED indicator for power on • No load power consumption <0.5W
• Built-in 12V/0.3A auxiliary output • Free air convection, higher power rating with forced air • Compact size: 4.0"L x 2.0"W x 1.1"H

Part No.	Mfr. Part No.	Output: Voltage @ Current	Output: Power	Load Regulation (±%)	Line Regulation (±%)	Efficiency (%)	Pricing: 1	Pricing: 10
2172447	EPP-150-12	12V @ 12.5A	100.8W	1.0	0.5	91.5	$74.95	$69.95
2172412	EPP-100-24	24V @ 4.2A	100.8W	1.0	0.5	92.0	59.95	56.95
2172463	EPP-150-24	24V @ 6.25A	100.8W	1.0	0.5	93.0	74.95	69.95
2164279	EPP-300-24*	24V @ 12.5A	300W	1.0	0.5	92.5	74.95	67.95

*5.0"L x 3.0"W x 1.4"H, built-in remote sense function, 12V/0.5A aux output

EPP-150

EPS Series

• Input: 85-264VAC @ 47-63Hz, 120-370VDC • Short-circuit, overload, over-voltage protection • Cooling by free air convection • LED indicator for power on
• No load consumption less than 0.3W • Compact size: 3.0"L x 2.0"W x 0.9"H (P/N 2164498: 4.0"L x 2.0"W x 1.1"H)

2164316	EPS-25-5	5V @ 5.0A	25W	1.0	0.5	81.0	$11.95	$10.95
2164498	EPS-45-5	5V @ 8.0A	40W	1.0	0.5	82.0	13.95	12.95
2164324	EPS-25-7.5	7.5V @ 3.4A	25.5W	1.0	0.5	83.0	11.95	10.95
2164332	EPS-25-12	12V @ 2.1A	20.08W	0.5	0.5	86.0	11.95	10.95
2164341	EPS-25-15	15V @ 1.7A	25.5W	0.5	0.5	87.0	11.95	10.95

EPS-25

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

LED Enclosed Power Supplies

NEW MARKED IN PINK

For Indoor and Outdoor Applications

- Suitable for LED lighting & moving sign application
- Short-circuit/overload/overvoltage/overtemperature protection
- 100% full-load burn-in test
- Universal AC input/full range
- Cooling by free air convection
- UL1310 class 2 power unit

PLN Series

LPC/LPV/ELN/PLN Series
- Working temperature: -30˚C to 50˚C
- Plastic case
- Inrush current: 40A/230VAC
- Constant voltage and current
- Two-year warranty

CLG Series
- Metal case
- Working temperature: -30˚C to 70˚C
- Adjustable voltage and current
- Inrush current: 40A/230VAC
- Built-in active PFC function
- Three-year warranty

CLG Series

HLG Series
- Metal case
- Working temperature: -30˚C to 60˚C
- Adjustable voltage and constant current
- Inrush current: 75A/230VAC
- Built-in active PFC function
- Three-year warranty

PLP Series
- Open frame
- Working temperature: -30˚C to 70˚C
- Output current level adjustable
- Inrush current: 42A/230VAC
- Built-in PFC function
- Two-year warranty

PLC Series
- Plastic case
- Working temperature: -30˚C to 50˚C
- Adjustable voltage and current
- Inrush current: 40A/230VAC
- Built-in constant current limiting circuit
- Two-year warranty

★Web Code: LPP

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power (W)	Input Voltage (VAC @ Hz)	Size (L" x W" x H")	Enclosure Rating	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing 1	Pricing 10
2101307	Mean Well	LPC-35-700	+9-48V @ 0.7A	33.6	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/TUV/CE	$16.95	$15.49
2142061	Mean Well	APV-12-12	+12V @ 0-1A	12	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	2.0	1.0	CE	6.49	5.95
2102596	Mean Well	LPV-20-12	+12V @ 0-1.67A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	11.95	9.95
2103142	Mean Well	LPV-35-12	+12V @ 0-3A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	15.95	14.49
2122976	Mean Well	PLN-45-12	+12V @ 0-3.8A	45.6	90-295 @ 47-63	7.1 x 2.4 x 1.3	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	9.95	9.49
2103169	Mean Well	LPV-60-12	+12V @ 0-5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	18.95	16.95
2105308	Mean Well	ELN-60-12†	+12V @ 0-5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	24.95	21.95
1918913	Mean Well	PLN-60-12	+12V @ 0-5A	60	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	35.95	30.95
1585805	Mean Well	CLG-100-12	+12V @ 5A	60	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	52.95	45.95
2148105	Mean Well	HLG-120H-12B	+12V @ 10A	120	90-305 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	0.5	UL/CUL/TUV/CE/PFC	69.95	63.95
2105050	Mean Well	CLG-150-12C	+12V @ 11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	54.95	49.95
1954877	Mean Well	CLG-150-12A	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	54.95	49.95
2108699	Mean Well	CLG-150-12†	+12V @ 11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	54.95	49.95
2141780	Mean Well	HLG-320H-12A	+12V @ 22A	264	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP65	2.0	0.5	UL/CUL/TUV/CB/CE/PFC	122.95	104.95
2102609	Mean Well	LPV-20-15	+15V @ 0-1.33A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/TUV/CE	6.95	6.49
2102617	Mean Well	LPV-20-24	+24V @ 0-0.84A	20.2	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/CE	11.95	9.95
2102799	Mean Well	LPV-35-24	+24V @ 0-1.5A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CE	15.95	14.49
2102801	Mean Well	LPV-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CE	18.95	16.95
2105252	Mean Well	ELN-60-24	+24V @ 2.5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	24.95	21.95
1919027	Mean Well	CLG-60-24	+24V @ 0-2.5A	60	90-295 @ 47-63	7.7 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	40.95	36.95
2103871	Mean Well	PLC-100-24	+24V @ 0-4A	96	90-264 @ 47-63	7.9 x 2.7 x 1.4	—	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	45.95	39.95
1585872	Mean Well	CLG-100-24	+24V @ 0-4A	96	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CE/PFC	52.95	45.95
2103433	Mean Well	CLG-150-24	+24V @ 6.3A	151.2	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	54.95	49.95
1954885	Mean Well	CLG-150-24A	+24V @ 0-6.3A	150	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	54.95	49.95
2102174	Mean Well	HLG-240H-24A	+24V @ 10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/CUL/TUV/CE/PFC	84.95	74.95
2115127	Mean Well	HLG-240H-24B	+24V @ 10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	84.95	74.95
2147903	Mean Well	HLG-320H-24	+24V @ 13.3A	320	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP67	0.5	0.5	UL/CUL/TUV/CB/CE/PFC	122.95	104.95
2100574	Mean Well	PLN-60-27	+27V @ 0-2.3A	62.1	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUS/TUV/CE/PFC	19.95	18.95
2102051	Mean Well	CLG-150-30B**	+30V @ 5A	150	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/TUV/CE/PFC	19.95	18.95
2148009	Mean Well	HLG-150H-30B**	+30V @ 5A	150	90-277 @ 50-60	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/TUV/CE/PFC	49.95	44.95
2148025	Mean Well	HLG-150H-36B	+36V @ 4.2A	151.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	69.95	62.95
2101121	Mean Well	LPC-20-350	+48V @ 0-0.35A	16.8	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL	11.95	10.49
2100591	Mean Well	PLN-60-48	+48V @ 0-1.3A	62.5	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CSA/CE/PFC	35.95	30.95

*Primary Output **Dimmable † Dimmable options

Dimmable LED Drivers with Magnetic Transformer Core

The most compact LED drivers on the market with a magnetic transformer core!
- Input: 120VAC @ 60Hz
- Class 2, high efficiency
- ETL, CSA listed

NEW MARKED IN PINK

Part No.	Mfr. Part No.	Voltage @ Current	Power	Efficiency	Size (L" x W" x H")	1	5
2199771	M40L12	12VAC @ 3.3A	40W	90.3%	5.1 x 2.2 x 2.2	$54.95	$49.95
2199797	M50L12	12VAC @ 4.3A	50W	89.7%	6.1 x 2.6 x 2.3	59.95	54.95
2199818	M60L12	12VAC @ 4.8A	60W	89.2%	6.1 x 2.6 x 2.3	64.95	59.95
2199594	M20L12DC	12VDC @ 1.6A	20W	85.7%	5.0 x 2.1 x 2.0	59.95	54.95
2199658	M60L12DC	12VDC @ 4.8A	60W	89.2%	6.1 x 2.6 x 2.2	74.95	69.95

40A DC DIN-Rail UPS Module & 20A Power Supply Redundancy Module

★Web Code: MBM

Part No.	Mfr. Part No.	Description	DC Input/DC BUS	Output Voltage @ Current	Charge Current	Certification	1	10
2103273	DR-UPS40	Battery controller for UPS	24-29V @ 40A	21-29VDC @ 0-40A	2A	CE	$43.95	$39.95
2105009	DR-RDN20	2-input redundancy module	21-28V @ 20A	30V @ 20A	—	CE	25.95	23.49

2103273 (Rail not included)

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

DIN-Rail Switching Power Supplies

★Web Code: RBY

- Short-circuit, overload, overvoltage protection
- Low cost, high reliability
- 100% full-load burn-in test
- For DIN mounting rail, see page 20

UL-508

- For DIN-Rail terminal blocks see Web
- Universal AC input range
- Soft-start circuit, limiting AC surge current

373182 (Fig. 1)

1943300 (Fig. 2) Rail not included

192699 (Fig. 3)

1943393 (Fig. 4) Rail not included

1943481 (Fig. 5) Rail not included

212291 (Fig. 6)

212274 (Fig. 7)

2081086 (Fig. 8) Rail not included

2100873 (Fig. 9) Rail not included

221892 (Fig. 10)

252663 (Fig. 11)

2094944 (Fig. 12) Rail not included

Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	Certification	1	10
2103978	MDR-10-5ℛ	2	5VDC @ 2A	10	88-264 @ 47-63	0.33A(115V)/0.21A(230V)	3.5 x .89 x 3.9	0.4	UL/CUL/TUV/CB/CE	$13.49	$12.49
2101243	DR-15-5ℛ	9	5VDC @ 2.4A	12	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	1.0 x 3.7 x 2.2	0.2	UL/CUL/TUV/CE	13.49	12.49
1943300	MDR-20-5ℛ	2	5VDC @ 3A	15	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
212303	DR-4505ℛ	3	5VDC @ 5A	25	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.9	UL/CUL/TUV/CE	18.95	16.95
1943393	MDR-40-5ℛ	4	5VDC @ 6A	30	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
1943449	MDR-60-5ℛ	4	5VDC @ 10A	50	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	22.95	20.95
1952978	MDR-10-12ℛ	2	12VDC @ 0.84A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.49	12.49
2094952	DR-15-12ℛ	9	12VDC @ 1.25A	15	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CE	13.49	12.49
1943334	MDR-20-12ℛ	2	12VDC @ 1.67A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
373182	DR-30-12ℛ	1	12VDC @ 2A	24	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943406	MDR-40-12ℛ	4	12VDC @ 3.33A	40	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
192699	DR-4512ℛ	3	12VDC @ 3.5A	42	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	18.95	16.95
373230	DR-60-12ℛ	1	12VDC @ 4.5A	54	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	23.95	21.95
1943457	MDR-60-12ℛ	4	12VDC @ 5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	22.95	20.95
212291	DR-75-12ℛ	6	12VDC @ 6.3A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	32.95	29.95
1943511	DR-100-12ℛ	1	12VDC @ 7.5A	90	85-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	3.9 x 3.7 x 2.2	0.8	UL/CUL/TUV/CE	32.95	29.95
1943481	MDR-100-12ℛ	5	12VDC @ 7.5A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	39.95	35.95
212274	DR-120-12ℛ	7	12VDC @ 10A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	40.95	36.95
2099366	SDR-120-12ℛ†	8	12VDC @ 10A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	61.95	55.95
2101391	DR-15-15ℛ	9	15VDC @ 1A	15	88-264 @ 47-63	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CB/CE	13.49	12.49
1943342	MDR-20-15ℛ	2	15VDC @ 1.24A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
373238	DR-60-15ℛ	1	15VDC @ 4A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	23.95	21.95
1952986	MDR-10-24ℛ	2	24VDC @ 0.42A	10	85-264 @ 47-63/120-370	0.33A(115V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.49	12.49
2100873	DR-15-24ℛ	9	24VDC @ 0.63A	15.2	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	2.2 x 1.0 x 3.7	0.2	UL/CUL/TUV/CE	13.49	12.49
1943385	MDR-20-24ℛ	2	24VDC @ 1A	24	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
373203	DR-30-24ℛ	1	24VDC @ 1.5A	36	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943422	MDR-40-24ℛ	4	24VDC @ 1.7A	40.8	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	20.95	18.95
192681	DR-4524ℛ	3	24VDC @ 2A	48	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	18.95	16.95
373246	DR-60-24ℛ	1	24VDC @ 2.5A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	23.95	21.95
1943465	MDR-60-24ℛ	4	24VDC @ 2.5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	22.95	20.95
212282	DR-75-24ℛ	6	24VDC @ 3.2A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	32.95	29.95
1943490	MDR-100-24ℛ	5	24VDC @ 4A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	39.95	35.95
1943537	DR-100-24ℛ	1	24VDC @ 4.2A	100	88-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	2.2 x 3.9 x 3.7	0.8	UL/CUL/TUV/CE	32.95	29.95
212266	DR-120-24ℛ	7	24VDC @ 5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	40.95	36.95
1953727	DRH-120-24ℛ	7	24VDC @ 5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	60.95	54.95
2099374	SDR-120-24ℛ†	8	24VDC @ 5A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	61.95	55.95
221892	DRP-240-24ℛ†	10	24VDC @ 10A	240	85-264 @ 47-63/120-370	2.8A(115V)/1.4A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	64.95	58.95
373123	DRT-240-24ℛ	10	24VDC @ 10A	240	3-phase 340-550 @ 47-63/480-780	0.95A(400V)/0.75A(500V)	3.9 x 4.9 x 4.9	2.9	UL/CUL/TUV/CE	84.95	76.95
2081086	SDR-240-24ℛ†	8	24VDC @ 10A	240	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	99.95	89.95
252663	DRP-480-24ℛ†	11	24VDC @ 20A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	104.95	94.95
295938	DRP-480S-24ℛ†	11	24VDC @ 20A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	114.95	104.95
372577	DRT-480-24ℛ	11	24VDC @ 20A	480	3-phase 340-550 @ 47-63/480-780	1.7A(400V)/1.3(500V)	8.9 x 5.0 x 3.9	5.5	UL/CUL/TUV/CE	119.95	109.95
2094944	SDR-480-24ℛ†	12	24VDC @ 20A	480	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	4.9 x 3.4 x 5.0	4.9	UL/CUL/TUV/CE	154.95	139.95
373131	DRT-960-24ℛ	11	24VDC @ 40A	960	340-550 @ 47-63	2A(400V)/1.6A(500V)	10.9 x 3.9 x 4.9	7.3	UL/CUL/TUV/CE	224.95	209.95
1943473	MDR-60-48ℛ	4	48VDC @ 1.25A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	22.95	20.95
221904	DR-120-48ℛ	7	48VDC @ 2.5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	40.95	36.95
1953735	DRH-120-48ℛ	7	48VDC @ 2.5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	39.95	36.95
2107338	SDR-120-48ℛ	8	48VDC @ 2.5A	120	88-264 @ 47-63	1.4A(115V)/0.7A(230V)	4.9 x 1.6 x 4.5	1.5	UL/CUL/TUV/CB/CE	61.95	55.95
221883	DRP-240-48ℛ†	10	48VDC @ 5A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	64.95	58.95
2094936	SDR-240-48ℛ†	8	48VDC @ 5A	240	88-264 @ 47-63/120-370	2.6A(115V)/1.3A(350V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	99.95	89.95
252655	DRP-480-48ℛ†	11	48VDC @ 10A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	104.95	94.95
301306	DRP-480S-48ℛ†	11	48VDC @ 10A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	114.95	104.95
2107346	SDR-480-48ℛ	12	48VDC @ 10A	480	90-264 @ 47-63	5A(115V)/2.5A(230V)	4.9 x 3.4 x 5.1	3.5	UL/CUL/TUV/CB/CE	154.95	139.95

*Switch selectable †With Power Factor Correction

ℛ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

15 to 504-Watt Enclosed Converters

Performance at Value Prices


SD-150

- 2:1 wide input range • 100% burn-in test • Working temp.: -10˚C to +60˚C • Protection: short-circuit, overload and overvoltage

SD-15 Series • Built-in EMI filter, low ripple noise • One-year warranty

SD-25/SD-50/SD-100/SD-150 Series • Isolation voltage: 1500VDC • Built-in EMI filter, low ripple noise • One-year warranty

SD-200/350 Series • Isolation volt.: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • **SD-200:** One-year warranty; **SD-350:** Two-year warranty

SD-500 Series • Isolation voltage: 2000VAC • DC input active surge current limiting

- Wide 4:1 ~ 2:1 SC input range • Forced air cooling by built-in DC fan w/ fan speed control function • Three-year warranty

★Web Code: UBC

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Power (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
1953778	SD-15A-5R	9.2-18V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	$13.49	$12.49
1953786	SD-15B-5R	18-36V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	13.49	12.49
175662	SD-25A-5R	9-18V	+5V @ 5.0A	25	3.9 x 3.8 x 1.4	5	0.5	0.5	100	CE	21.95	19.95
212549	SD-50A-5R	9-18V	+5V @ 10A	50	6.3 x 3.8 x 1.5	5	0.5	0.5	100	CE	26.95	24.49
1953823	SD-15B-12R	18-36V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	13.49	12.49
1953840	SD-15C-12R	36-72V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	13.49	12.49
175805	SD-25A-12R	9-18V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	21.95	19.95
2107178	SD-25C-12R	36-72V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	21.95	19.95
1537483	SD-50A-12R	9.2-18V	+12V @ 4.2A	50.1	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	26.95	24.49
212531	SD-50B-12R	19-36V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	26.95	24.49
212506	SD-50C-12R	36-72V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	26.95	24.49
212469	SD-100C-12R	36-72V	+12V @ 8.5A	102	7.8 x 3.9 x 1.5	7	0.3	0.3	120	CE	33.95	30.95
217270	SD-150B-12R	19-36V	+12V @ 12.5A	150	7.8 x 4.3 x 2.0	7	0.5	0.5	120	CE	43.95	39.95
1953920	SD-200C-12R	36-72V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	CE	74.95	67.95
1953760	SD-200D-12R	72-144V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	TUV/CE	74.95	67.95
1953962	SD-350B-12R	19-36V	+12V @ 27.5A	330	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	89.95	79.95
1954033	SD-500L-12R	19-72V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	CE	134.95	119.95
175813	SD-25A-24R	9-18V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	21.95	19.95
2107186	SD-25C-24R	36-72V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	21.95	19.95
2107266	SD-50A-24R	9.2-18V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	26.95	24.49
212514	SD-50B-24R	19-36V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	26.95	24.49
2107039	SD-100C-24R	36-72V	+24V @ 4.2A	100.8	7.8 x 3.9 x 1.6	7	0.2	0.2	150	CE	33.95	30.95
2107098	SD-150C-24R	36-72V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	CE	43.95	39.95
2107119	SD-150D-24R	72-144V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	TUV/CE	43.95	39.95
1953954	SD-200B-24R	19-36V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	74.95	67.95
1953743	SD-200C-24R	36-72V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	UL/CE	74.95	67.95
1954009	SD-350C-24R	36-72V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	CE	89.95	79.95
1953971	SD-350B-24R	19-36V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	CE	89.95	79.95
1954025	SD-500L-24R	19-72V	+24V @ 21A	504	8.5 x 4.5 x 2.0	7	0.5	0.5	150	TUV/CE	134.95	119.95
1953911	SD-200B-48R	19-36V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	74.95	67.95
1953989	SD-350B-48R	19-36V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	89.95	79.95

Unregulated Encapsulated Converters

★Web Code: SBH

- Input range: 4.5-5.5V
- Ripple & noise: 100mV p-p
- Input filter: capacitor type
- Line & load regulation: ±1.0%
- No external components needed
- 1000VDC isolation
- 100% burn-in test
- Protection: short-circuit
- One-year warranty
- Working temp.: -15˚C to +60˚C

216831



Part No.	Mfr. Part No.	Output Voltage@Current	Output Power	Size (L"xW"xH")	Pins	Pricing 1	Pricing 10
213226	SRS-0505R	+5V @ 100mA	0.5W	.88 x .39 x .33	8	$4.49	$3.95
216831	SPR01L-12R	+12V @ 84mA	1W	.77 x .28 x .40	4	4.95	4.49

Dual Adj. Regulated Power Supply Kit

JAMECO ValuePro

- Adjustable positive/negative supplies ±5 to ±15VDC, 175mA–750mA per supply
- LED on indicator • 48-piece kit
- PC board construction
- Difficulty level: intermediate • 120VAC input
- Size: 5.1"L x 3.5"W x 2.0"H • Weight: 2.1 lbs.

Part No.	Cross Ref. No.	1	5
20626	JE215	$29.95	$26.95

We carry AT & ATX Computer Power Supplies – See page 9

OPEN-FRAME AC-DC SWITCHING & MEDICAL POWER SUPPLIES

Non-Medical

Part No.	Mfr.	Mfr. Part No.	Output	Power	1	10
2197741	Skynet	SNP-N563	3.3V@6A / 5V@8A	60W	$11.95	$10.95
2188617	Powdec	CMC0522	5V@1.5A / 12V@0.6A	15W	11.95	10.95
2188692	TDK Lambda	ZWS5-5	5V@1A	5W	10.95	9.95
2188730	Phihong	PSA10L-050	5V@2A	10W	12.95	11.95
2188772	UMEC	UP0401S-09	9V@4.4A	40W	12.95	11.95

Medical-Grade

2129676	Elpac	MSM40D	5.1V@4A / 24V@1A /-12V@0.4A	40W	$10.95	$9.95
2205413	Astrodyne	ASM60-1380	12V@5A	60W	12.95	11.95
2129633	Elpac	MS6524F	24V@2.7A	65W	5.95	4.95
2129684	Elpac	MSM7524	24V@4.6A	110W	13.95	12.49

★Power Inverters — Enter Web Code XEL

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Encapsulated DC-to-DC Converters

★Web Code: NAX

SCW03, SCW05, SCW08, SDM30, SKE10, SKA15, SKE15 & SLW05 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Shield metal case
- 2:1 wide input range
- Cooling by free air convection
- One-year warranty

SCW03

SLW05

DCW03, DCW08 & DKE10 Series

- 1000VDC I/O isolation
- 2:1 wide input range
- Short-circuit/overload protection
- Cooling by free air convection
- Shield metal case
- One-year warranty

DCW08

DKE10

DKA30 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Cooling by free air convection
- Remote on/off control
- 2:1 wide input range
- Six sided shielded metal case
- One-year warranty

DKA30

Part No.	Manufacturer	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Pwr (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
Single Output													
213269	Mean Well	SCW03A-05	9-18V	+5V @ 0.6A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	$9.95	$8.95
216937	Mean Well	SLW05B-05	18-36V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
1953313	Mean Well	SCW05B-05	18-36V	+5V @ 1A	5	1.25 x 0.8 x 0.48	8	0.5	0.5	50	CE	10.95	9.95
213234	Mean Well	SLW05C-05	36-72V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
216962	Mean Well	SKE10A-05	9-18V	+5V @ 2A	10	2.0 x 1.0 x 0.44	5	0.3	1.0	50	CE	18.95	16.95
155716	Mean Well	SKE15A-05	9-18V	+5V @ 3A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	50	CE	18.95	16.95
1953495	Mean Well	SCW08A-12	9-18V	+12V @ 0.67A	8	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	14.95	13.49
155708	Mean Well	SKE15A-12	9-18V	+12V @ 1.25A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	60	CE	18.95	16.95
1953161	Mean Well	SKA15A-12	9-18V	+12V @ 1.25A	15	2.0 x 1.0 x 0.44	5	0.2	0.5	60	CE	19.95	17.95
217242	Mean Well	SDM30-24S12	18-36V	+12V @ 2.5A	30	2.0 x 2.0 x 0.63	8	1.0	1.0	100	CE	26.95	24.49
155695	Mean Well	SKE15A-24	9-18V	+24V @ 0.625A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	80	CE	18.95	16.95
Double Output													
161702	Mean Well	DCW03A-12	9-18V	±12V @ 0.125A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	$9.95	$8.95
217092	Mean Well	DKE10A-12	9-18V	±12V @ 0.42A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49
1953364	Mean Well	DCW08A-15	9-18V	±15V @ 0.267A	8	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	14.49	13.49
217112	Mean Well	DKE10A-15	9-18V	±15V @ 0.333A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49
217075	Mean Well	DKE10B-15	18-36V	±15V @ 0.333A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49
1954130	Mean Well	DKA30A-15	9-18V	±15V @ 1A	30	2.0 x 2.0 x 0.82	8	0.5	0.5	100	CE	25.95	23.95

Li-Ion and LiFePO4 Batteries

Applications: personal computers, workstations, test equipment, feature telephones, copiers, fax machines, video scramblers/descramblers and remotes.

Li-Ion – Rechargeable – Pressure Fit

★Web Code: LII

Part No.	Product No.	Mfr.	Fig.	Size	Volts	mAh	Dimensions	1	10	25
2144286	30201	Tenergy	1	RCR123A	3	900	1.26"L x 0.63"Dia.	$4.69	$4.49	$4.25
2140349	30006	Tenergy	2	18650	3.7	2600	2.56"L x 0.72"Dia.	9.95	9.49	8.95

LiFePO4 – Rechargeable – Pressure Fit

★Web Code: LIF

Part No.	Product No.	Mfr.	Fig.	Size	Volts	mAh	Dimensions	1	10	25
2144227	30225	Tenergy	3	14500	3.2	400	1.91"L x 0.56"Dia.	$2.25	$1.95	$1.75
2144278	30200	Tenergy	1	RCR123A	3.2	900	1.26"L x 0.63"Dia.	2.95	2.65	2.39

Fig. 1

Fig. 2

Fig. 3

12V LiFePO4 Rechargeable Batteries

- Drop-in replacements for Lead Acid batteries
- Last 5 times longer and half the weight of SLA
- Perfect for motorcycle starter, 12VDC power, medical equipment, LED light power supply, and solar power
- Works with existing charging systems
- 0.25" quick connect terminals

★Web Code: LIF

2170290

Part No.	Mfr. Part No.	Amp-Hrs	Size (L" x W" x H")	1	10
2170290	LFP128075	7.5	5.9 x 2.6 x 3.9	$99.95	$89.95
2170329	LFP128198	19.8	7.1 x 3.0 x 6.5	249.95	234.95

NEW SPECIAL BUYS — POWER SUPPLIES

2197468

Part No.	Description	Output Voltage @ Current	1	10
320258	AC-AC wall adapter	9VAC @ 1.5A	$9.95	$8.95
2197468	Switching wall adapter	12VDC @ 1A	9.95	8.95
2197601	Switching table-top	12VDC @ 2A	10.95	9.95
2158485	Switching table-top	12VDC @ 4.2A	13.95	12.95
2148009	Enclosed LED	30VDC @ 5A	49.95	44.95
2197855	Switching enclosed	48VDC @ 6.7A	59.95	54.95

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

RS Series Enclosed Single Output Power Supplies

Enclosed Power Supplies on pages 16-20

The RS G3 series of Mean Well power supplies are well known for their incredible reliabilty and miniature size. Able to endure harsh testing conditions, these high power density supplies are a great value and worth every penny.

- High efficiency, long life, and high reliability
- 100% full load burn-in test • Short circuit, overload, and overvoltage protection
- Utilizes all 221°F (105°C) long life electrolytic capacitors
- High operating temperatures of up to 158°F (70°C)
- Withstands 5G vibration testing
- Certifications: UL/CUL/TUV/CE/CB
- 3-year warranty

★Web Code: EPS

Part No.	Mfr. Part No.	Volt. @ Curr. (min-max)	Power (W)	Ripple & Noise (mVp-p)	Efficiency	Size (L" x W" x H")	1	10
1919051	RS-15-12R*	12V @ 0-1.3A	15.6	120	81%	2.5 x 2.0 x 1.1	$9.95	$8.95
323300	RS-25-12R	12V @ 0-2.1A	25.2	120	79%	3.1 x 2.0 x 1.1	11.95	10.95
323337	RS-35-12R	12V @ 0-3.0A	36	120	81%	3.9 x 3.2 x 1.4	12.95	11.95
323599	RS-75-12R	12V @ 0-6.0A	72	120	81%	5.1 x 3.8 x 1.5	17.95	15.95
323302	RS-25-15R	15V @ 0-1.7A	25.5	120	82%	3.1 x 2.0 x 1.1	11.95	10.95
323311	RS-25-24R	24V @ 0-1.1A	26.4	120	84%	3.1 x 2.0 x 1.1	11.95	10.95
323620	RS-75-24R	24V @ 0-3.2A	76.8	120	85%	5.1 x 3.8 x 1.5	17.95	15.95
323732	RS-100-24R	24V @ 0-4.5A	108	120	84%	6.3 x 3.8 x 1.5	23.95	21.95

*Over-temperature protection

RS-25

GS Series AC-to-DC Switching Wall Adapter Power Supplies

Wall Adapters on pages 2-6

These wall adapters are the most economical way to get quality power from a trusted brand you can count on. Compact and efficient with all the safety standards met.

★Web Code: CDZ

- Universal AC input: 90-264VAC @ 47-63Hz, 135-370VDC
- GS12/GS18: No load power consumption < 0.3W
- Passes Energy Star Level IV (except 1952855)
- Class 2 power (without earth pin)
- Short-circuit, overload, over-voltage protection
- Output connector: 2.1mm x 5.5mm female center positive
- GS25/GS06: No load power consumption < 0.5W
- Meets EISA 2007 (Energy Independence and Security Act)
- Fully enclosed plastic case
- Certifications: UL/CUL/CB/FCC

Part No.	Mfr. Part No.	Output Voltage @ Current	Efficiency	Size (L" x W" x H")	1	10	50
379623	GS25U05-P1J	+5V @ 4.0A	74%	3.1 x 2.1 x 1.3	$11.95	$10.95	$9.95
1940686	GS06U-2P1J	+9V @ 0.66A	74%	1.3 x 2.6 x 1.7	9.49	8.49	7.95
1940694	GS06U-3P1J	+12V @ 0.5A	76%	1.3 x 2.6 x 1.7	9.49	8.49	7.95
1940774	GS12U12-P1J*	+12V @ 1.0A	77%	2.6 x 1.9 x 1.0	10.49	8.95	8.49
1952855	GS18U12-P1J	+12V @ 1.5A	85%	3.1 x 2.1 x 1.3	11.95	10.95	10.49

*Over-temperature protection

GS-25

AC-to-DC Regulated Switching Wall Adapter Power Supplies

Regulated Switching Wall Adapters on pages 2-4

Everyone loves quick results. With these wall adapter power supplies, all you need to do is plug and charge. The fast charging gets your devices fully functional in no time so you can be more productive.

★Web Code: CDZ

Part No.	Mfr. Part No.	Output Voltage @ Current	Input (VAC @ Hz)	DC Output Connector†	Size (H" x W" x D")	Slim Line Type	Pricing 1	Pricing 10
2188537	EPAS-101W-05R*	5V @ 2A	100-240 @ 50-60	2.5mm x 5.5mm RA	2.4 x 1.7 x 1.0	Yes	$8.95	$7.95
2135451	LFS054000D-A8SR	5V @ 4A	90-132 @ 47-63	2.1mm x 5.5mm RA	3.3 x 2.0 x 1.5	Yes	10.95	9.95
2179585	ADS-18C-1209R	9V @ 2A	100-240 @ 50-60	2.1mm x 5.5mm RA	2.8 x 2.0 x 1.3	Yes	10.95	9.95
2173124	EA1030UR	9V @ 3A	100-240 @ 50-60	2.1mm x 5.5mm	3.9 x 1.7 x 1.2	No	14.95	13.49
2179593	ADS18C-121218R	12V @ 1.5A	100-240 @ 50-60	2.1mm x 5.5mm RA	2.8 x 2.0 x 1.3	Yes	10.95	9.95
2209166	G1P-650R	12V @ 2A	100-240 @ 50-60	2.5mm x 5.5mm	3.1 x 2.1 x 1.3	No	11.95	10.49
252866	MTR-09304R	24V @ 0.5A	90-264 @ 47-63	2.1mm x 5.5mm	2.9 x 1.3 x 2.2	Yes	12.95	11.95
2173095	EA1030DUR	24V @ 1.25A	100-240 @ 50-60	2.1mm x 5.5mm	3.9 x 1.7 x 1.2	No	14.95	13.95

*Mfr.: CUI, Inc. †Female, center positive polarity, RA = right angle

2188537

Class 2 Dimmable LED Drivers

LED Power Supplies on page 21

These are the most compact LED drivers on the market with a magnetic transformer core. They are equipped with one push-to-reset circuit breaker on the output which protects both the load and driver.

- Acoustic humming and buzzing free
- Push-to-reset circuit breaker on the output
- NEMA 3R enclosure
- 2 side knockouts
- Works with low-voltage TRIAC dimmers
- Class 2
- ETL and CSA listed

NEW MARKED IN PINK

★LED Drivers Web Code: REK

Part No.	Mfr. Part No.	Output Voltage @ Current	Efficiency	Input Current @ Full Load	Size (L" x W" x H")	Figure	1	5
2199797	M50L12	12VAC @ 4.3A	89.7%	0.41A	6.1 x 2.6 x 2.3	1	$59.95	$54.95
2199818	M60L12	12VAC @ 4.8A	89.2%	0.54A	6.1 x 2.6 x 2.3	1	64.95	59.95
2199658	M60L12DC	12VDC @ 4.8A	89.2%	0.54A	6.1 x 2.6 x 2.3	1	74.95	69.95
2199973	M150L12DC-AR	12VDC @ 13.3A	80.0%	0.54A	9.8 x 3.0 x 3.0	2	84.95	79.95
2199666	M60L24DC	24VDC @ 2.4A	85.0%	0.898A	6.6 x 2.3 x 2.6	1	74.95	69.95
2199674	M96L24DC	24VDC @ 4.0A	89.6%	1.95A	6.6 x 2.3 x 2.6	1	79.95	74.95

Fig. 1

Fig. 2

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

JAMECO® ELECTRONICS
1355 Shoreway Rd., Belmont, CA 94002-4100

Toll-Free Ordering and Customer Support:
Domestic: 1-800-831-4242 / International: 1-650-592-8097
Domestic Fax: 1-800-237-6948 / International Fax: 1-650-592-2503
Website: http://www.Jameco.com / Email: Info@Jameco.com

PRESORTED STANDARD
U.S. POSTAGE PAID
JAMECO ELECTRONICS

Customer Number

Like our catalog, we have even more products on our website

Scan on your smartphone with a code reader app.

If you would like to unsubscribe from Jameco's catalog please visit www.Jameco.com/CatalogUnsubscribe

Printed in USA

Thousands of Power Products To Choose From

Open-Frame Power Supplies

Open-Frame Power Supplies on pages 15-16 & 20

Get clean, reliable power at a great price with the selection of open-frame power supplies. Allow them to cool by free air or place them in an enclosure for environmental protection.

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current	Size (L"xW"xH")	1	10
2197741	American Skynet	SNP-N563	+3.3V @ 6A; +5V @ 8A	5.0 x 3.0 x 1.3	$11.95	$10.95
2188617	Powdec	CMC0522	+5V @ 1.5A; +12V @ 0.6A	3.5 x 2.3 x 1.1	11.95	10.95
2210757	Phihong	PSS-40-304	+5V @ 4A; +15V @ 1.6A; -15V @ 0.2A	4.3 x 2.5 x 1.2	16.95	15.49
2210749	Phihong	PSA15LN3-090	+9V @ 1.6A	4.3 x 1.6 x 0.9	16.95	15.49
252401	Mean Well	LPS-50-12	+12V @ 4.2A	7.7 x 2.2 x 0.9	13.95	12.49
2205413	Astrodyne	ASM60-1380*	+12V @ 5.0A	4.0 x 2.0 x 1.7	12.95	11.95
2129633	Elpac Power	MS6524F*	+24V @ 2.7A	5.0 x 3.0 x 1.2	5.95	4.95
2129684	Elpac Power	MSM7524*	+24V @ 4.6A	5.8 x 3.4 x 1.7	13.95	12.49

2197741

2205413

*Medical safety rated

DIN-Rail Power Supplies on page 22

MDR-60 & MDR-100 Series DIN-Rail Power Supplies

Have a reliable power supply for your workbench and keep your workspace free at the same time! DIN-rail supplies provide all the necessary power while hanging on a convenient DIN rail and out of your way.

Web Code: RBY

- Universal AC input: 85-264VAC @ 47-63Hz, or 120-370VDC
- Can be installed on DIN rail TS35x7.5 or 15 (recommend P/N 248736 or 2172666, pg 20)
- Short-circuit, overload, over-voltage protection • 100% full load burn-in test
- Cooling by free air convection • DC OK relay contact • MDR-60: No load power consumption < 0.75W
- MDR-100: No load power consumption < 1W, ZCS/ZVS technology to reduce power dissipation • 3-year warranty

MDR-100
Rail not included

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Size (W" x H" x D")	Wt. (lbs.)	1	5
1943449	MDR-60-5	5VDC @ 10.0A	50	1.6 x 3.5 x 3.9	0.73	$22.95	$20.95
1943457	MDR-60-12	12VDC @ 5.0A	60	1.6 x 3.5 x 3.9	0.73	22.95	20.95
1943481	MDR-100-12*	12VDC @ 7.5A	90	2.2 x 3.5 x 3.9	0.93	39.95	35.95
1943465	MDR-60-24	24VDC @ 2.5A	60	1.6 x 3.5 x 3.9	0.73	22.95	20.95
1943490	MDR-100-24*	24VDC @ 4.0A	96	2.2 x 3.5 x 3.9	0.93	39.95	35.95
1943473	MDR-60-48	48VDC @ 1.25A	60	1.6 x 3.5 x 3.9	0.73	22.95	20.95
1943502	MDR-100-48*	48VDC @ 2.0A	96	2.2 x 3.5 x 3.9	0.93	39.95	35.95

*Over-temperature protection

Table-Top Power Supplies

Table-Top Power Supplies on pages 6-9

- Input voltage: 100-240VAC @ 50-60Hz • Color: black
- AC cord not included (recommend P/N 38050, pg 14)

Center Positive Polarity

Part No.	Mfr.	Mfr. Part No.	Output Voltage @ Current	Output Connector††	DC Cord Lgth	Size (L" x W" x H")	1	10
196218	Globtek	GT-21089-1305-T3	+5VDC @ 2.0A	2.1mm x 5.5mm F2	6'	3.4 x 1.9 x 1.3	$15.95	$14.49
320081	Globtek	TR9CA6000LCP-Y(R)†	+5VDC @ 6.0A	2.5mm x 5.5mm F2	6'	4.7 x 2.4 x 1.3	39.95	35.95
2173036	Phihong	PSA18U-090	+9VDC @ 2.0A	2.1mm x 5.5mm F2	5'	4.0 x 1.9 x 1.3	9.95	8.95
2197601	Delta	EADP-24KBB*	+12VDC @ 2.0A	2.1mm x 5.5mm F2 RA	7'	4.7 x 2.0 x 1.2	10.95	9.95
2129609	Phihong	PSA65U-120	+12VDC @ 5.0A	2.1mm x 5.5mm F2	3.3'	5.9 x 2.8 x 1.5	15.95	13.49
2205165	ReliaPro	EA11011H-120†	+12VDC @ 10A	DIN-4 Male	4'	5.4 x 2.3 x 1.3	46.95	42.95
1942788	ReliaPro	EA1050B240†	+24VDC @ 2.5A	2.1mm x 5.5mm F2	6'	4.8 x 2.4 x 1.4	17.49	15.49
2172797	ReliaPro	EA11001D-240†	+24VDC @ 3.75A	2.5mm x 5.5mm F2	4'	5.4 x 2.3 x 1.4	27.95	24.95

2173036

2205165

*AC cord included †LED indicator ††Female, center positive polarity (except P/N 2205165), RA = right angle

Contact Information

Order Desk
Phone: 1-800-831-4242
Fax: 1-800-237-6948
E-mail: Sales@Jameco.com

Technical Support
Phone: 1-800-831-4242
E-mail: Tech@Jameco.com

Customer Service
Phone: 1-800-536-4316
E-mail: CustService@Jameco.com

Credit Department
Phone: 650-592-8097
Fax: 650-802-1583
E-mail: Credit@Jameco.com

International Order Desk
Phone: 650-592-8097
Fax: 650-592-2503
E-mail: International@Jameco.com

Feedback
E-mail: Feedback@Jameco.com

The Jameco RobotStore
Website: www.RobotStore.com

Club Jameco
Website: www.ClubJameco.com